

Data Transmission



Raj Jain

Professor of CIS
The Ohio State University

Columbus, OH 43210


Jain@ACM.Org

<http://www.cis.ohio-state.edu/~jain/>




- Time Domain and Frequency Domain
- Bit, Hertz
- Decibels
- Data vs Signal
- Attenuation, Delay Distortion, Noise, Capacity
- Physical Media: Twisted pair, coaxial cable, optical fiber, radio, microwave, satellite,

Analog vs Digital

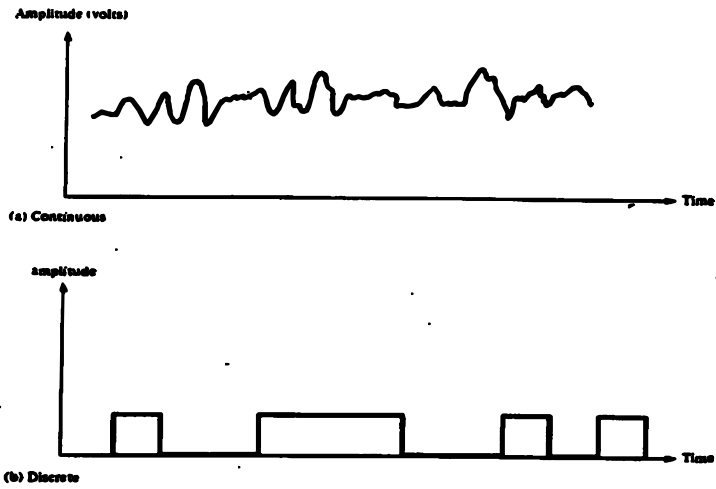


Frequency, Period, and Phase


□ $A \sin(2\pi ft + \theta)$

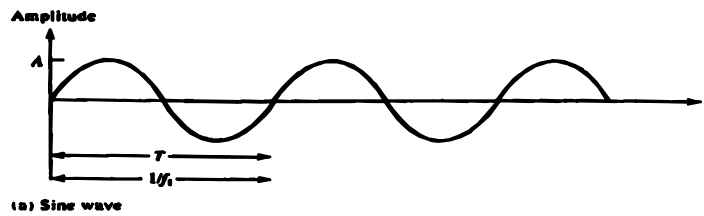


□ $A \sin(2\pi ft)$ and $A \sin(2\pi ft + \pi/2)$

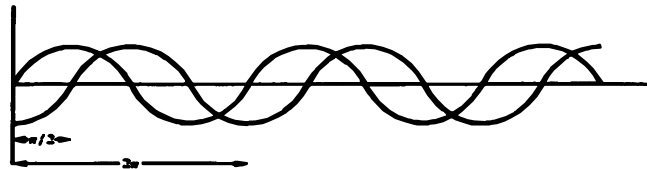


Time Domain vs Frequency Domain

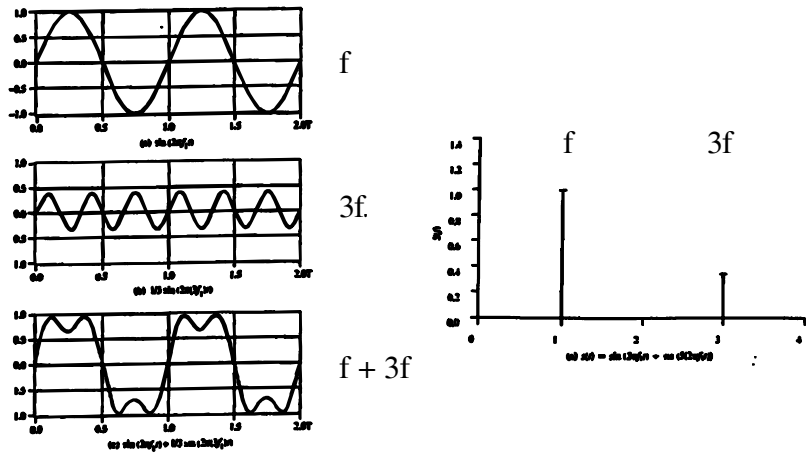

Effect of Bandwidth

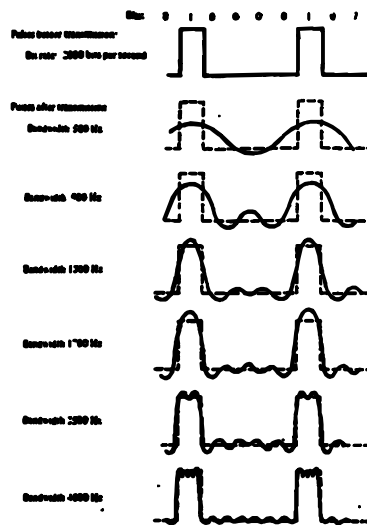

Data vs Signal

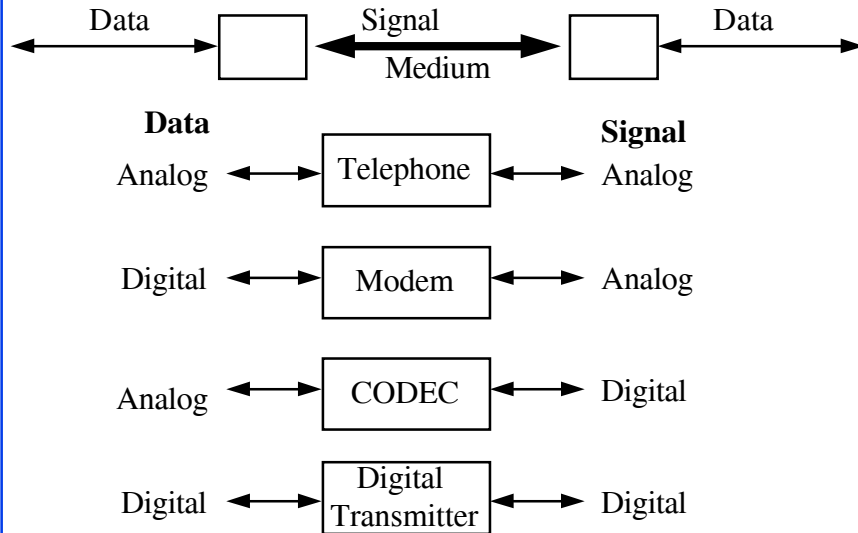


The Ohio State University

Raj Jain

2-7

Attenuation and Dispersion (Delay Distortion)

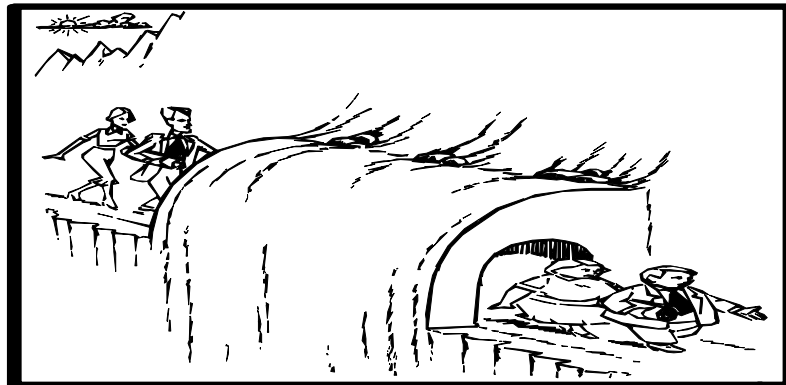

Distance →

The Ohio State University

Raj Jain


2-8

Decibels

- Attenuation = $\text{Log}_{10} \frac{P_{in}}{P_{out}}$ Bel
- Attenuation = $10 \text{ Log}_{10} \frac{P_{in}}{P_{out}}$ deciBel
- Attenuation = $20 \text{ Log}_{10} \frac{V_{in}}{V_{out}}$ deciBel Since $P=V^2/R$
- **Example 1:** $P_{in} = 10 \text{ mW}$, $P_{out}=5 \text{ mW}$
Attenuation = $10 \log_{10} (10/5) = 10 \log_{10} 2 = 3 \text{ dB}$
- **Example 2:** $P_{in} = 100\text{mW}$, $P_{out}=1 \text{ mW}$
Attenuation = $10 \log_{10} (100/1) = 10 \log_{10} 100 = 20 \text{ dB}$

Channel Capacity

- Capacity = Maximum data rate for a channel
- **Nyquist Theorem:** Bandwidth = W
Data rate $\leq 2 W$
- Bilevel Encoding: Data rate = $2 \times \text{Bandwidth}$

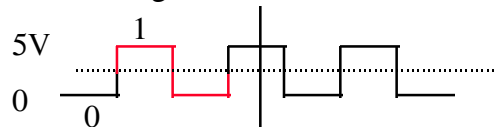

- Multilevel Encoding: Data rate = $2 \times \text{Bandwidth} \times \log_2 M$



Example: $M=4$, Capacity = $4 \times \text{Bandwidth}$

Noise

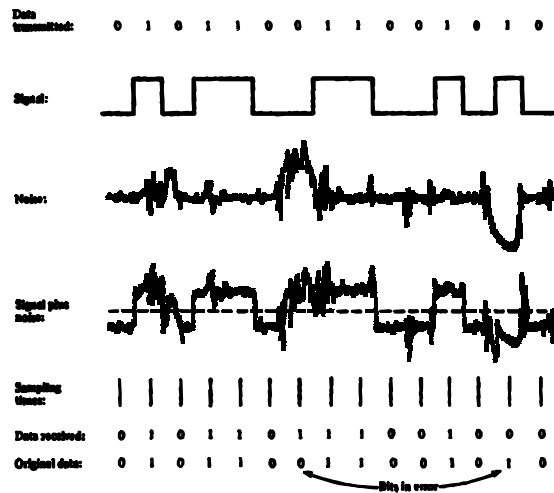


Fig 2.15

Shannon's Theorem

- Capacity = Bandwidth $\times \log_2 (1 + \text{signal/noise})$
- Example: Phone wire bandwidth = 3100 Hz

$$S/N = 30 \text{ dB}$$

$$10 \log_{10} S/N = 30$$

$$\log_{10} S/N = 3$$

$$S/N = 10^3 = 1000$$

$$\begin{aligned} \text{Capacity} &= 3100 \log_2 (1 + 1000) \\ &= 30,894 \text{ bps} \end{aligned}$$

Thermal Noise

- Due to thermal agitation of electrons in the media and devices
- Uniformly distributed across the frequency spectrum
- It cannot be eliminated \Rightarrow Upper bound on capacity
- Thermal noise = kTW watts
 - k = Boltzman's constant = 1.3803×10^{-23} Joules/ ° K
 - T = Temperature in ° K
 - W = Bandwidth
- Noise density N_0 = Noise per Hertz = kT

Bit Error Rate

- Energy/bit $E_b = ST_b$, where T_b = bit time
- For each code, E_b/N_0 and bit error rates are related
- **Example:** For a particular coding, 10^{-4} BER is achieved if E_b/N_0 is 8.4 dB. How much signal is required for 2400 bps at 290°K?

$$T_b = \text{bit time} = 1/2400 \text{ second} \Rightarrow E_b = S/2400$$

$$N_0 = kT$$

$$E_b/N_0 = S/(2400kT)$$

$$\text{in dB: } 10\text{Log}(S/2400kT) = 8.4$$

$$10 \text{ Log } S = 8.4 + 10 \text{ Log } 2400 + 10 \text{ Log } k + 10 \text{ log } T \\ = -161.8 \text{ dBW}$$


Transmission Media

- Twisted pair
- coaxial cable
- Optical Fiber
- Radio
- Terrestrial Microwave
- Satellite Microwave

Twisted Pair


- Unshielded Twisted Pair (UTP)
 - Category 3 (Cat 3): Voice Grade. Telephone wire.
 - Category 4 (Cat 4)
 - Category 5 (Cat 5): Data Grade. Better quality.
100 Mbps over 50 m possible
- Shielded Twisted Pair (STP)

Coaxial Cable

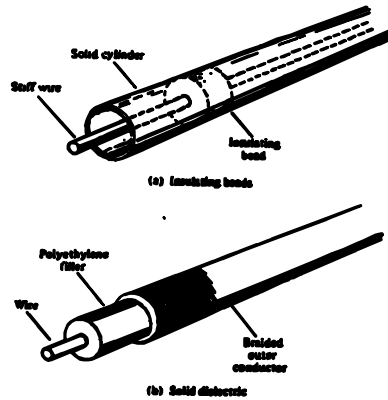


Optical Fiber


- Modes
 $\text{Index} = \frac{\text{Index of refraction}}{\text{Speed in Vacuum}}$
 $= \frac{\text{Speed in Vacuum}}{\text{Speed in medium}}$

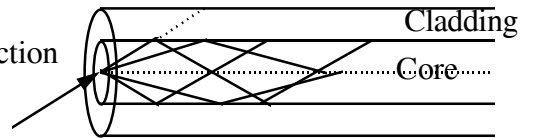

- Multimode

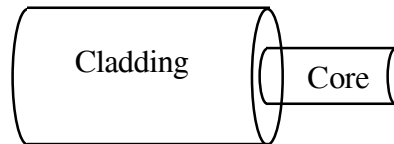


- Single Mode

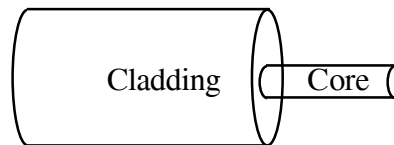

Radio

- ❑ Omnidirectional
- ❑ 30 MHz to 1 GHz \Rightarrow FM, UHF, VHF
- ❑ Short distance and low data rates
- ❑ Maximum distance slightly more than $7.14 (Kh)^{1/2}$
- ❑ Attenuation = $10 \log (4\pi d/\lambda)^2$
 d =distance, λ =wavelength, $\lambda f=c$
- ❑ Less attenuation since λ is large
- ❑ Multipath interference
- ❑ Used in Aloha system:
 407.35 MHz for transmission from users and
 413.35 MHz to users
 100 kHz bandwidth, 9600 bps, 30 km

Electromagnetic Spectrum

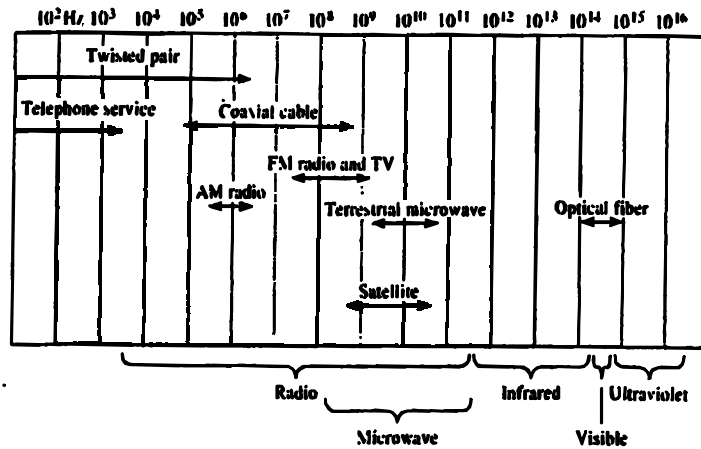

Terrestrial Microwave


- ❑ Above 100 MHz, Line of sight communication
- ❑ Parabolic dish antenna 10 ft diameter
- ❑ Maximum distance $d = 7.14 (Kh)^{1/2}$ km
 K= adjustment factor =4/3, h=height in m
 Example: h=100 m $d=7.14 (133)^{1/2} =82$ km

- ❑ Typical data rates:


Band GHz	Bandwidth MHz	Data Rate Mbps
2	7	12
6	30	90
11	40	90
18	220	274

- ❑ Attenuation $L = 10 \log (4\pi d/\lambda)^2$ dB; d=distance, λ =wavelength

Satellite Microwave

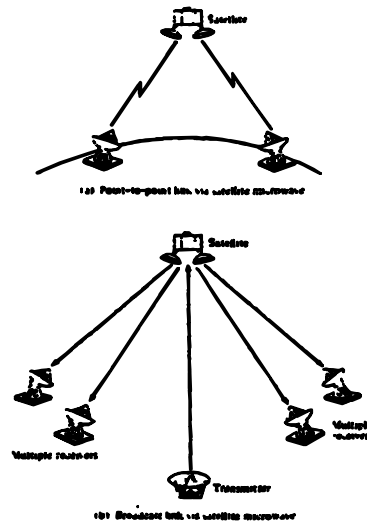

Summary



- Time domain vs frequency domain
- Data rate vs Bandwidth
- Data vs Signal, Analog vs Digital
- Attenuation, Dispersion (delay distortion), noise
- Media: Twisted pair, coaxial, fiber, microwave, radio

Homework

- Exercises 2.7, 2.17, 2.20