

# MODELING TRAFFIC MANAGEMENT IN ATM NETWORKS WITH OPNET

Rohit Goyal<sup>1</sup>, Raj Jain<sup>1</sup>, Sonia Fahmy<sup>1</sup>, Shobana Narayanaswamy<sup>2</sup>

1. The Ohio State University, Department of Computer and Information Science, 2015 Neil Ave, DL 395, Columbus, OH 43210
2. MIL3 INC, 3400 International Drive, NW · Washington, DC 20008

## ABSTRACT

Asynchronous transfer mode (ATM) is the new generation of computer and communication networks that are being deployed throughout the telecommunication industry as well as in campus backbones. ATM technology distinguishes itself from the previous networking protocols in that it has the latest traffic management technology and thus allows guaranteeing delay, throughput, and other performance measures. This in turn allows users to integrate voice, video, and data on the same network. Available bit rate (ABR) service in ATM has been designed to fairly distribute all unused capacity to data traffic and is specified in the ATM Forum's Traffic Management (TM4.0) standard. This paper will describe the OPNET models that have been developed for ATM and ABR design and analysis.

## INTRODUCTION

With the convergence of telecommunication and computer industries, computer networking is adopting a new paradigm called Asynchronous Transfer Mode (ATM). ATM was selected by the telecommunication (carrier) industry as the technology to deliver the Broadband Integrated Services Digital Network (B-ISDN) carrier service. ATM is designed to handle different kinds of communication traffic (voice, audio, video and data) in an integrated manner. It is first technology to promise seamless interworking between the LAN and WAN network environments. The international standards for ATM networks have been formulated by the ATM Forum and ITU-T.

### The ATM Quality of Service Model

ATM uses short, fixed size (53 bytes) cells with connection oriented data transfer. This facilitates packet based voice, video and data transmission in an integrated services network. The ATM Forum specifies that ATM connections belong to ATM service categories that support certain Quality of Service (QoS) requirements. The ATM-Forum Traffic Management Specification (TM4.0) defines five service categories for ATM

networks. Each service category is defined using a traffic contract and a set of QoS parameters. The *traffic contract* is a set of parameters that specify the characteristics of the source traffic. The *QoS parameters* are negotiated by the source with the network, and are used to define the expected quality of service provided by the network. For each service category, the network guarantees the negotiated QoS parameters if the end system complies with the negotiated traffic contract. For non-compliant traffic, the network need not maintain the QoS objective.

Four traffic parameters are specified – Peak Cell Rate (PCR), Sustainable Cell Rate (SCR), Maximum Burst Size (MBS), and Minimum Cell Rate (MCR). A tolerance value for PCR, called Cell Delay Variation Tolerance (CDVT), is also specified. This defines the allowable variation from PCR for a connection's traffic to be conforming. The network determines conformance to PCR and SCR by using the Generic Cell Rate Algorithm (GCRA). The GCRA is a version of the token bucket algorithm that determines if an incoming cell is conforming to the traffic specifications. If a cell is non-conforming, the usage parameter control (UPC) function of the network may tag the cell by setting the CLP bit in the cell. The untagged and the aggregate cell streams are referred to as the CLP0 and CLP0+1 cell streams respectively.

The ATM Forum also defines six QoS parameters that specify the network performance objectives for the connection – Cell Loss Ratio (CLR), Cell Delay Variation (peak-to-peak CDV or 2-point CDV), Cell Transfer Delay (max CTD or mean CTD), Cell Error Ratio (CER), Severely Errored Cell Block Ratio (SECBR) and Cell Misinsertion Rate (CMR). Of these, the CDV, CTD and the CLR parameters are negotiated during connection setup, while the others are specified by the network. The CLR is further classified as being applicable for the CLP0 cell stream or the CLP0+1 cell stream.

Based on the QoS parameters, the ITU-T defines four QoS classes with defined values for some or all of the QoS parameters -- Class 1 (stringent class), Class 2

(tolerant class), Class 3 (bi-level class), and Class U (unspecified class). In addition, ATM switches are free to support additional QoS levels (or classes) for providing a finer granularity QoS support.

### ATM Service Categories

Based on the traffic parameters and the QoS parameters, the ATM forum specifies five service categories for the transport of ATM cells. The *Constant Bit Rate (CBR)* service category is defined for traffic that requires a constant amount of bandwidth, specified by a Peak Cell Rate (PCR), to be continuously available. The network guarantees that all cells emitted by the source that conform to this PCR will be transferred by the network with minimal cell loss, and within fixed bounds of maxCTD and peak-to-peak CDV.

The *real time Variable Bit Rate (VBR-rt)* class is characterized by PCR (and its associated tolerance), Sustained Cell Rate (SCR) and a Maximum Burst Size (MBS) in cells that controls the bursty nature of VBR traffic. The network attempts to deliver cells of conforming connections within fixed bounds of maxCTD and peak-to-peak CDV. *Non-real-time VBR* sources are also specified by PCR, SCR and MBS, but are less sensitive to delay and delay variation than the real time sources. The network does not specify any delay and delay variation parameters for the VBR-nrt service. Both VBR-rt and VBR-nrt are further divided into three categories based on whether CLR0 or CLR0+1 is specified as the CLR performance objective for the network, and whether tagging is allowed by the user or not.

The *Available Bit Rate (ABR)* service category is specified by a PCR and Minimum Cell Rate (MCR) which is guaranteed by the network. The bandwidth allocated by the network to an ABR connection may vary during the life of a connection, but may not be less than MCR. ABR connections use a rate-based closed-loop feedback-control mechanism for congestion control. The network tries to maintain a low Cell Loss Ratio by changing the allowed cell rates (ACR) at which a source can send. The *Unspecified Bit Rate (UBR)* class is intended for best effort applications, and this category does not support any service guarantees. UBR has no built in congestion control mechanisms. The UBR service manages congestion by efficient buffer management policies in the switch. A new service called Guaranteed Frame Rate (GFR) is being introduced at the ATM Forum and the ITU-T. GFR is based on UBR, but guarantees a minimum rate to connections. The service

also recognizes AAL5 frames, and performs frame level dropping as opposed to cell level dropping.

### The OPNET Model

OPNET is a modeling and simulation tool [MIL31] that provides an environment for analysis of communication networks. The tool provides a three layer modeling hierarchy. The highest layer referred to as the network domain allows definition of network topologies. The second layer referred to as the node domain allows definition of node architectures (data flow within a node). The third layer (process domain) specifies logic or control flow among components in the form of a finite state machine.

### The OPNET ATM Model Suite

The OPNET ATM model suite (AMS) described in [MIL32] supports many of the characteristics of ATM networks. The model suite provides support for signaling, call setup and teardown, segmentation and reassembly of cells, cell transfer, traffic management and buffer management. Standard ATM nodes such as routers, stations, bridges, switches etc. are provided to facilitate building of common topologies used for the design and analysis of ATM networks.

Traffic management within AMS incorporates functions such as call admission control, policing using a continuous-state leaky bucket implementation (GCRA), call-based queuing, priority scheduling and collection of standard statistics such as end-to-end delay and end-to-end delay variation.

### Reference Topology

The example network topology used for the design and development of traffic management functions within AMS represents an N-source configuration shown in Figure 1. Source and destination end-systems are connected to a pair of ATM switches that communicate via a bottleneck link.

The node architecture for the end-system (source/destination) consists of AAL clients sending/receiving traffic to/from the AAL/ATM/PHY protocol stack. The AAL layer is responsible for segmentation of data traffic into AAL PDU's. The ATM layer (represented as four modules: management, layer, translation and switching) encapsulates the AAL PDU within the ATM cell and transmits the cell to the network. The management module is responsible for



are called Explicit Rate switches. RM cells are generated by the sources and travel along the data path to the *destination end systems*. The destinations simply return the RM cells to the sources.

Explicit rate switches normally wait for the arrival of an RM cell to give feedback to a source. However, under extreme congestion, they are allowed to generate an RM cell and send it immediately to the source. This optional mechanism is called backward explicit congestion notification (BECN).

Switches can use the virtual source/virtual destination (VS/VD) feature to segment the ABR control loop into smaller loops. In a VS/VD network, a switch can additionally behave both as a (virtual) destination end system and as a (virtual) source end system. As a destination end system, it turns around the RM cells to the sources from one segment. As a source end system, it generates RM cells for the next segment. This feature can allow feedback from nearby switches to reach sources faster, and allow hop-by-hop control.

At the time of connection setup, ABR sources negotiate several operating parameters with the network. The first among these is the peak cell rate (PCR). This is the maximum rate at which the source will be allowed to transmit on this virtual circuit (VC). The source can also request a minimum cell rate (MCR) which is the guaranteed minimum rate. The network has to reserve this bandwidth for the VC. During the data transmission stage, the rate at which a source is allowed to send at any particular instant is called the allowed cell rate (ACR). The ACR is dynamically changed between MCR and PCR. At the beginning of the connection, and after long idle intervals, ACR is set to initial cell rate (ICR). A complete list of parameters used in the ABR mechanism is given in [TM40].

Most resource management cells generated by the sources are counted as part of their network load in the sense that the total rate of data and RM cells should not exceed the ACR of the source. Such RM cells are called “in-rate” RM cells. Under exceptional circumstances, switches, destinations, or even sources can generate extra RM cells. These “out-of-rate” RM cells are not counted in the ACR of the source and are distinguished by having their cell loss priority (CLP) bit set, which means that the network will carry them only if there is plenty of bandwidth and can discard them if congested. The out-of-rate RM cells generated by the source and switch are limited to 10 RM cells per second per VC. One use of out-of-rate RM cells is for BECN from the

switches. Another use is for a source, whose ACR has been set to zero by the network, to periodically sense the state of the network. Out-of-rate RM cells are also used by destinations of VCs whose reverse direction ACR is either zero or not sufficient to return all RM cells received in the forward direction. Note that in-rate and out-of-rate distinction applies only to RM cells. All data cells in ABR should have CLP set to 0 and must always be within the rate allowed by the network.

Resource Management cells traveling from the source to the destination are called Forward RM (FRM) cells. The destination turns around these RM cells and sends them back to the source on the same VC. Such RM cells traveling from the destination to the source are called Backward RM (BRM) cells. Note that when there is bi-directional traffic, there are FRMs and BRMs in both directions on the Virtual Channel (VC). A direction bit (DIR) in the RM cell payload indicates whether it is an FRM or BRM.

### The ERICA Switch Scheme

The ERICA algorithm [SHIV] operates at each output port (or link) of a switch. The switch periodically monitors the load on each link and determines a load factor ( $z$ ), the available ABR capacity, and the number of currently active virtual connections or VCs ( $N$ ). A measurement or “averaging” interval is used for this purpose. These quantities are used to calculate the feedback which is indicated in RM cells. The feedback is given to the RM cells travelling in the reverse direction. Further, the switch gives at most one new feedback per source in any averaging interval. The key steps in ERICA are as follows:

**At the End of an Averaging Interval**, total ABR Capacity is computed as the difference between the link capacity and the bandwidth used by higher priority traffic. The Target ABR Capacity is then computed as a fraction (typically 0.9) of the total ABR capacity. The overload ( $Z$ ) and the fair share (FS) are calculated as

$$z \leftarrow \text{ABR Input Rate} / \text{Target ABR Capacity}$$
$$\text{FS} \leftarrow \text{Target ABR Capacity} / N$$

Where  $N$  is the number of active VCs. The maximum allocations of the previous current intervals are maintained as below:

$$\text{MaxAllocPrevious} \leftarrow \text{MaxAllocCurrent}$$
$$\text{MaxAllocCurrent} \leftarrow \text{FS}$$

**When an FRM is received**, the Current Cell Rate

(CCR) in the RM cell is noted for the VC:

$$CCR[VC] \leftarrow CCR\_in\_RM\_Cell$$

**When a BRM is received**

Feedback is calculated as follows and inserted in the ER field of the cell:

```


VCShare ← CCR[VC] / z
IF z > 1+ Δ
THEN ER ← Max (FairShare, VCShare)
ELSE ER ← Max (MaxAllocPrevious, VCShare)
MaxAllocCurrent ← Max(MaxAllocCurrent, ER)
IF (ER > FairShare AND CCR[VC] < FairShare
    THEN ER ← FairShare
ER in RM Cell ← Min (ER in RM Cell, ER,
Target ABR
    
```

Details of the ERICA algorithm are available from [SHIV].

**The Switch Process Model**

The OPNET process modeling methodology was used in the development of the switch process model that delivered basic capabilities of the core ATM switching fabric, ABR feedback control, buffer management and scheduling. The key steps of this modeling methodology include: definition of the system context, identifying interdependent modules, enumeration of events, selection of states of a process, construction of an event response table and construction of the finite state machine. The development of the OPNET Switch process model is described in the paragraphs below. A simple switch process receives cells on its input port. Cells are switched via the switching fabric to an output port based on its destination address. Cells may be enqueued at the output port and transmitted based on a scheduling algorithm. The functionality of a simple switch is illustrated in Figure 2.

Figure 2 A Simple ATM Switch

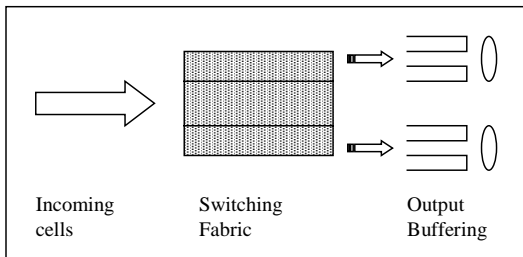

Logical events that can occur at the switch include a cell arrival, time to transmit as indicated by the scheduler and the end of fabric delay. Table 1 enumerates the

events that can occur at the switch and the associated interrupt types.

Table 1. ABR switch events


<i>Logical Event</i>	<i>Event Description</i>	<i>Interrupt Type</i>
Cell_Arrival	Arrival of an ATM cell at the switch	Stream
Time_to_send	Indication from the scheduler that it is time to transmit a cell	Self
End_of_fabric_delay	Indication that a cell has completed processing via the switch fabric	Self

Table 2 outlines the actions taken when an event occurs within the switch. Each row of this table represents a

Table 2 ATM ABR event response table

Current State	Logical Event	Condition	Action	Next State
None	Begsim	None	None	Init
Init		None	Initialize	Config
Config	Cell_Arrival	Neighbor notification not complete	Queue cell	Config
	Notify Complete	None	Process enqueued cells	Wait
Wait	Cell_arrival	Application traffic	Apply source rules before enqueue, schedule fabric delay	Wait
		Link Traffic and VSVD_ON	Apply destination rules, apply source rules before enqueue, schedule fabric delay	Wait
		Link_Traffic and VSVD_OFF	Schedule fabric delay	Wait
	End_of_fabric_delay	Cell can be buffered	Enqueue cell, activate scheduler	Wait
		Cell cannot be buffered	Destroy cell	Wait
	Time_to_send	More cells waiting to be sent	Dequeue and send cell, re-activate scheduler	Wait
		No more cells waiting	None	Wait

Figure 3 OPNET ATM ABR state machine implementation

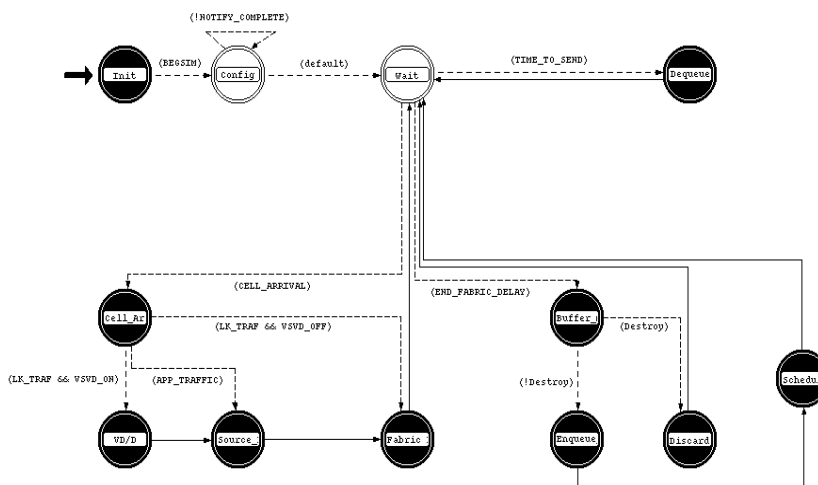

**References**

[TM40] ATM Forum Traffic Management Specification, Version 4.0, ATM Forum, April 1996.

[JAIN] Raj Jain et. al, "Source Behavior for ATM ABR Traffic Management: An Explanation," IEEE Communications Magazine, November 1996.

[SHIV] Shivkumar Kalyanaraman, et. al, "The ERICA switch algorithm for ABR traffic management in ATM

networks," submitted to IEEE/ACM Transactions on Networking.

[MIL31] OPNET Modeling Manual Vol 1, OPNET Version 3.5, MIL 3 Inc., 1997.

[MIL32] OPNET Models/Protocols Manual, OPNET Version 3.5, MIL 3 Inc., 1997.