

Networking Basics

Raj Jain

**Raj Jain is now at
Washington University in Saint Louis
Jain@cse.wustl.edu
<http://www.cse.wustl.edu/~jain/>**

Raj Jain



- ❑ Standards Organizations
- ❑ ISO/OSI and TCP/IP Reference Model
- ❑ Flow and Error Control
- ❑ Ethernet, HDLC, PPP
- ❑ Internet Protocol (IP), IPv6
- ❑ TCP
- ❑ Domain Name System

International Standards Organizations

- ❑ ISO: International Standards Organization
Chartered by United Nations
- ❑ ITU: International Telecommunications Union
 - ITU-T: Consultative Committee on International Telephone and Telegraph (CCITT)
 - ITU-R: Consultative Committee on International Radio (CCIR)
 - Example Standards: G.724, X.25, Q.931
 - www.itu.ch
- ❑ IEC: International Electrotechnical Commission

National Standards Organizations

- ANSI: American National Standards Institute
 - www.ansi.org
 - Non-governmental, nonprofit, over 300 committees
 - ANSI T1.105-1995 SONET
ANSI X3.131-1994 SCSI-2
 - Represents USA in ITU, IEC, and ISO



Professional Associations

- ❑ IEEE: Inst of Electrical and Electronic Engineers,
 - standards.ieee.org
 - IEEE \Rightarrow ISO (via ANSI)
 - Ethernet \Rightarrow IEEE 802.3 \Rightarrow ISO 8802-3:1998
- ❑ EIA: Electronic Industries Association, www.eia.org
 - Example: EIA-232 (RS-232)
- ❑ TIA: Telecommunications Industries Association,
 - www.tiaonline.org
- ❑ ATM Forum, www.atmforum.com
- ❑ Frame Relay Forum, www.frforum.com

Professional Communities

- IETF:
 - Internet Engineering Task Force, www.ietf.org
 - Originated by DARPA for TCP/IP protocol development
 - Now chartered by Internet Society
 - Request for Comments (RFC),
E.g., www.ietf.org/rfc/rfc0793.txt = TCP
 - Internet Drafts: ftp.ietf.org/internet-drafts/
 - draft-ietf-diffserv-framework-02.txt
 - draft-bhani-mpls-te-eval-00.txt

ISO/OSI Reference Model

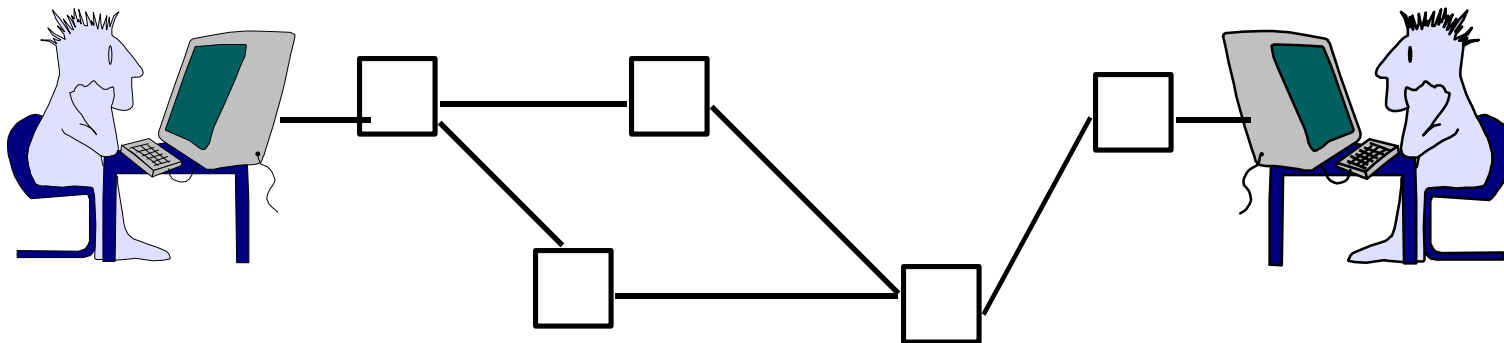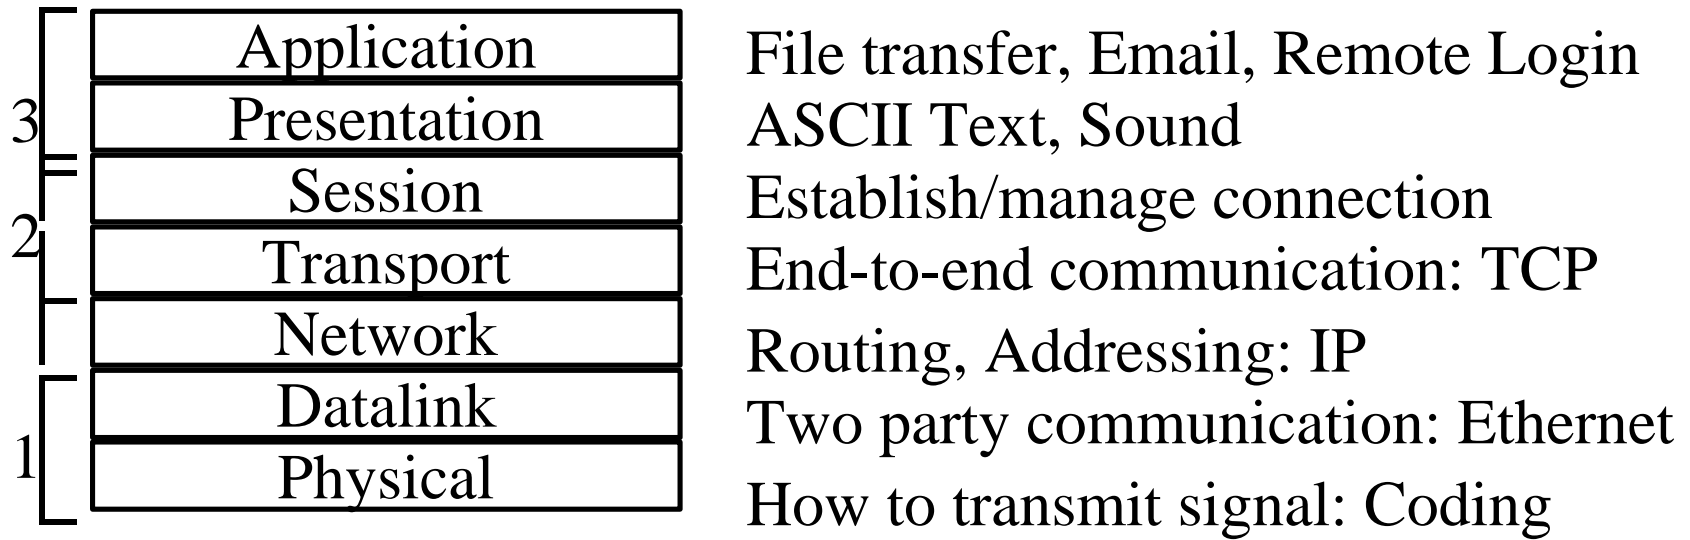

Raj Jain

TCP/IP Reference Model

- TCP = Transport Control Protocol
- IP = Internet Protocol (Routing)

TCP/IP Ref Model

TCP/IP Protocols


OSI Ref Model

Application	FTP	Telnet	HTTP	Application
Transport	TCP		UDP	Presentation
Internetwork	IP			Session
Host to Network	Ethernet	Packet Radio	Point-to-Point	Transport
				Network
				Datalink
				Physical

Raj Jain

Layered Packet Format



- Nth layer control info is passed as N-1th layer data.

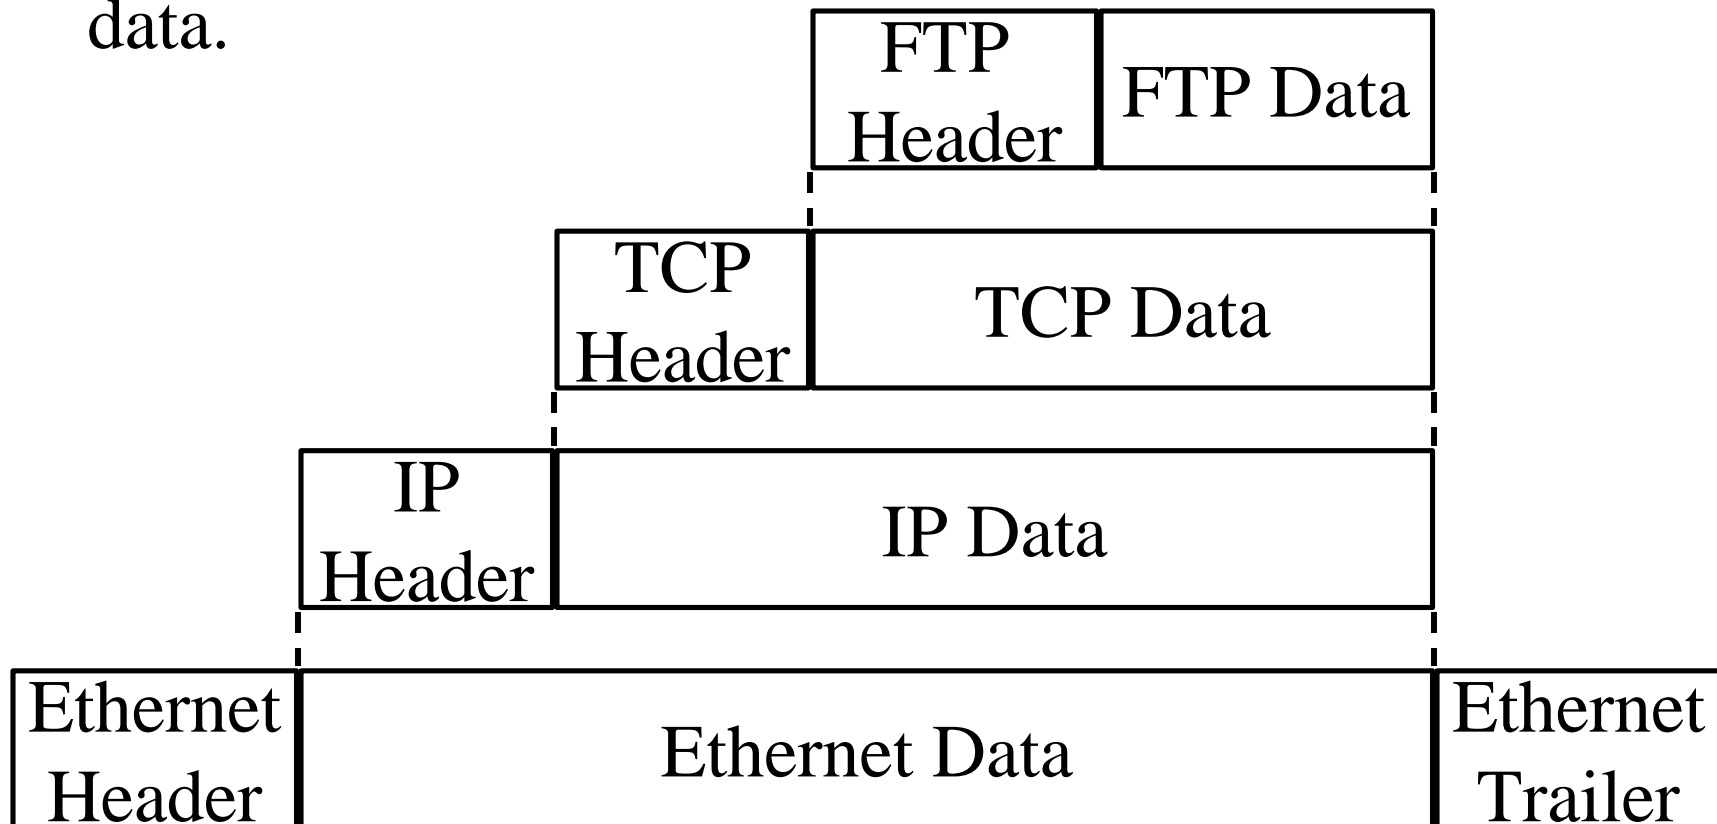

Raj Jain


Flow Control

- ❑ Flow Control = Sender does not flood the receiver, but maximizes throughput
- ❑ Sender throttled until receiver grants permission
- ❑ Methods: Stop and wait, Sliding window

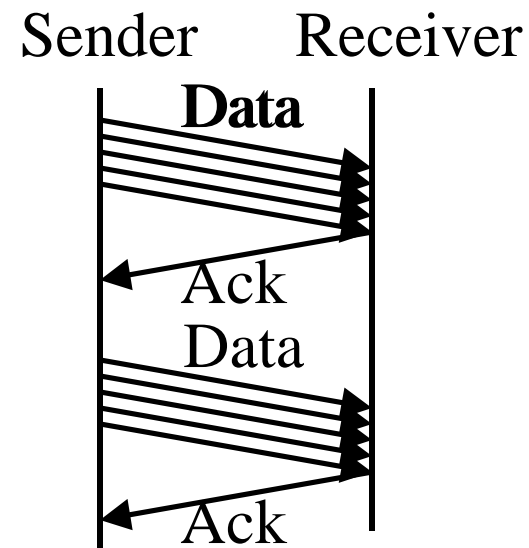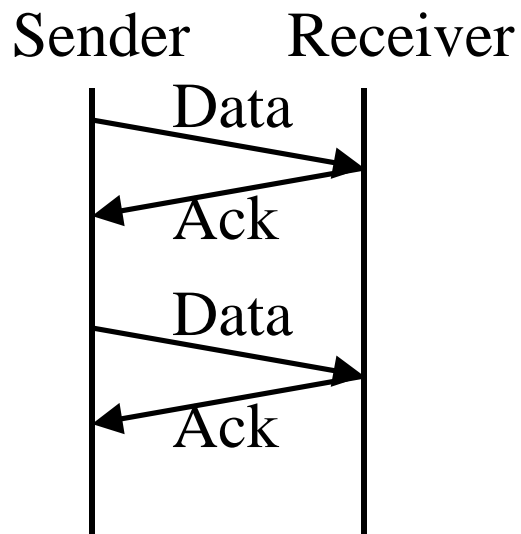


Error Control

- ❑ Error Control = Deliver frames without error, in the proper order to network layer
- ❑ Error Detection: Cyclic Redundancy Check, Sequence Numbers, Ack/Nak, Time-out
- ❑ Error Recovery: Automatic Repeat Request (ARQ)
Stop and Wait, Go back n Selective Reject

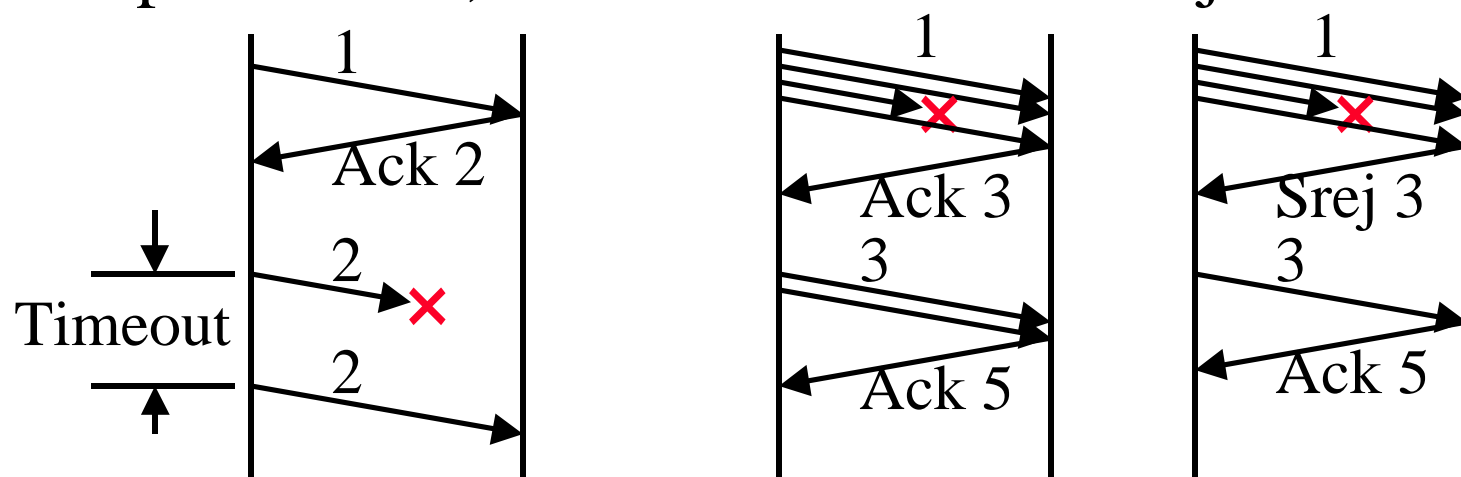

Raj Jain

Connection-Oriented vs Connectionless

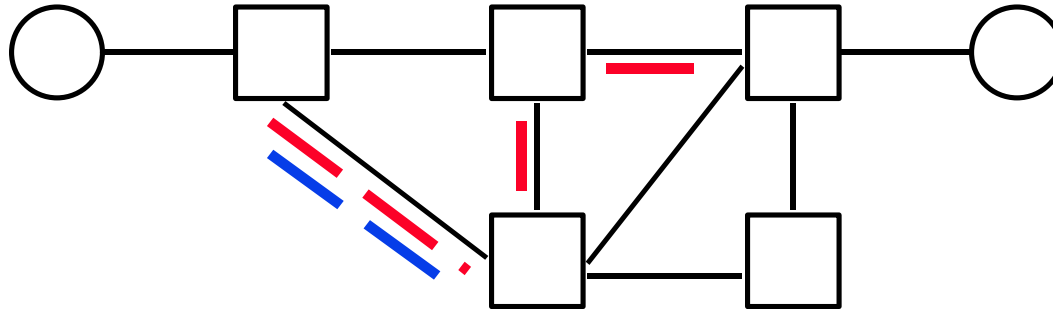

- ❑ Connection-Oriented: Telephone System
 - Path setup before data is sent
 - Data need not have address. Circuit number is sufficient.
- ❑ Connectionless: Postal System.
 - Complete address on each packet
 - The address decides the next hop at each router

Raj Jain

Multiple Access Protocols



(a) Multiple Access



(b) Carrier-Sense Multiple Access with Collision Detection

Raj Jain

Multiple Access Protocols

- ❑ Aloha at University of Hawaii:
Transmit whenever you like
Worst case utilization = $1/(2e) = 18\%$
- ❑ CSMA: Carrier Sense Multiple Access
Listen before you transmit
- ❑ CSMA/CD: CSMA with Collision Detection
Listen while transmitting.
Stop if you hear someone else.
- ❑ Ethernet uses CSMA/CD.
Standardized by IEEE 802.3 committee.

Ethernet Standards

- ❑ 10BASE5: 10 Mb/s over coaxial cable (ThickWire)
- ❑ 10BROAD36: 10 Mb/s over broadband cable, 3600 m max segments
- ❑ 1BASE5: 1 Mb/s over 2 pairs of UTP
- ❑ 10BASE2: 10 Mb/s over thin RG58 coaxial cable (ThinWire), 185 m max segments
- ❑ 10BASE-T: 10 Mb/s over 2 pairs of UTP
- ❑ 10BASE-FL: 10 Mb/s fiber optic point-to-point link
- ❑ 10BASE-FB: 10 Mb/s fiber optic backbone (between repeaters). Also, known as synchronous Ethernet.

HDLC Family

- ❑ Synchronous Data Link Control (SDLC): IBM
- ❑ High-Level Data Link Control (HDLC): ISO
- ❑ Link Access Procedure-Balanced (LAPB): X.25
- ❑ Link Access Procedure for the D channel (LAPD): ISDN
- ❑ Link Access Procedure for modems (LAPM): V.42
- ❑ Link Access Procedure for half-duplex links (LAPX): Teletex
- ❑ Point-to-Point Protocol (PPP): Internet
- ❑ Logical Link Control (LLC): IEEE
- ❑ Advanced Data Comm Control Proc (ADCCP): ANSI
- ❑ V.120 and Frame relay also use HDLC



HDLC




- ❑ Primary station: Issue commands
- ❑ Secondary Station: Issue responses
- ❑ Combined Station: Both primary and secondary
- ❑ Unbalanced Configuration: One or more secondary
- ❑ Balanced Configuration: Two combined station
- ❑ Normal Response Mode (NRM): Response from secondary
- ❑ Asynchronous Balanced Mode (ABM): Combined Station
- ❑ Asynchronous Response Mode (ARM): Secondary may respond before command

Raj Jain

HDLC Framing: Bit Stuffing

- ❑ HDLC frames are delimited by flags: 01111110
- ❑ Stuff bits if pattern appears in data
- ❑ Remove stuffed bits at destination

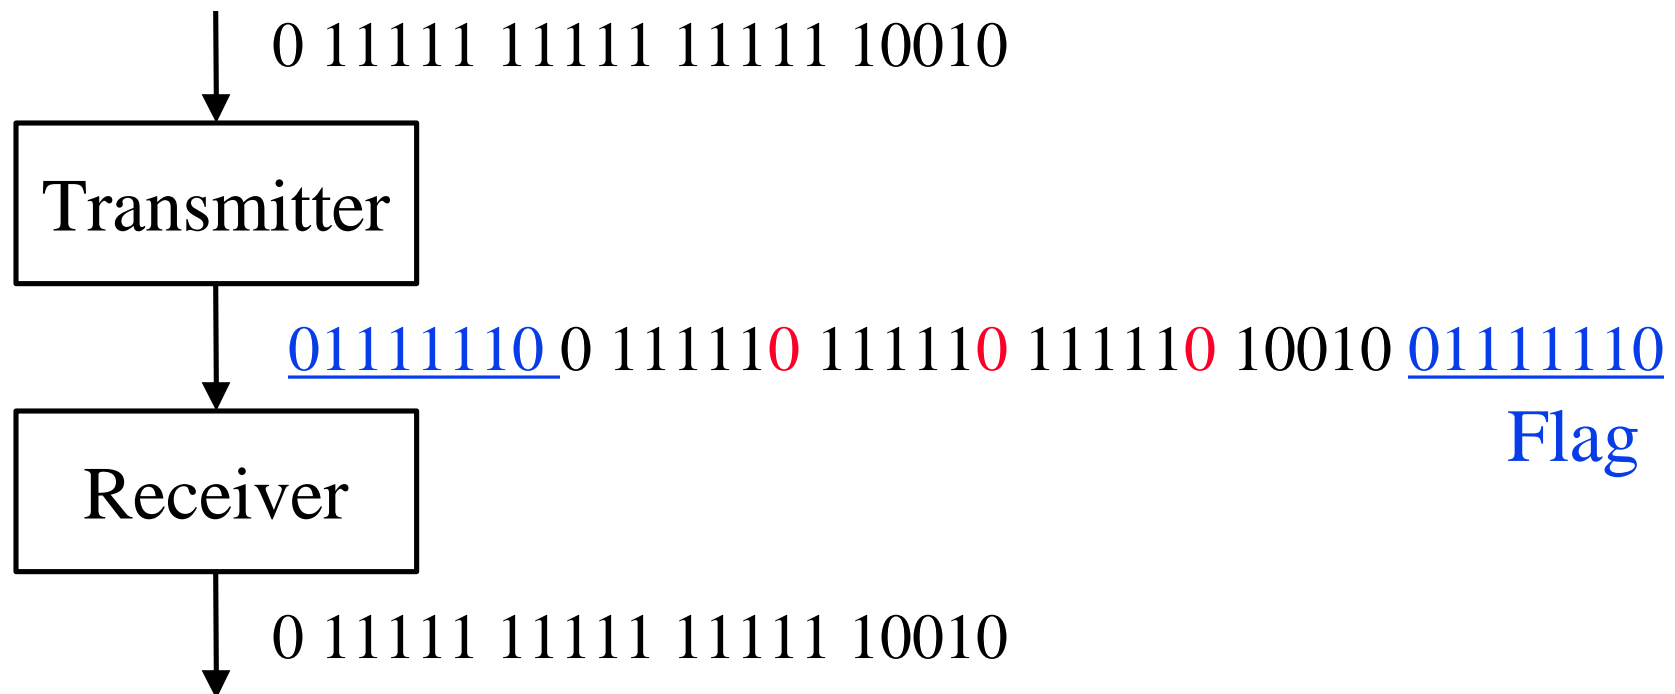

Raj Jain

HDLC Frames

- ❑ Information Frames: User data
 - Piggybacked Acks: Next frame expected
 - Poll/Final = Command/Response
- ❑ Supervisory Frames: Flow and error control
 - Go back N and Selective Reject
 - Final \Rightarrow No more data to send
- ❑ Unnumbered Frames: Control
 - Mode setting commands and responses
 - Information transfer commands and responses
 - Recovery commands and responses
 - Miscellaneous commands and responses

PPP: Introduction

- ❑ Point-to-point Protocol
- ❑ Originally for User-network connection
- ❑ Now being used for router-router connection also
- ❑ PPP is used when you connect to an internet service provider (ISP) via modem
- ❑ PPP is a variation of HDLC
- ❑ Uses flags like HDLC
- ❑ Uses byte stuffing in stead of bit stuffing

PPP in HDLC-Like Framing

Flag	Address	Control	Protocol	
------	---------	---------	----------	--

01111110 11111111 00000011

Info	Padding	CRC	Flag
------	---------	-----	------


- ❑ Flag = 0111 1110 = 7E
- ❑ Byte Stuffing:
 - 7E \Rightarrow 7D 5E
 - 7D \Rightarrow 7D 5D

Internet Protocol (IP)

- ❑ Connectionless service. Variable size datagrams
- ❑ Best-effort delivery: Delay, out-of-order, corruption, and loss possible. Higher layers should handle these.
- ❑ Handles only data forwarding
Uses routing tables prepared by other protocols, e.g.,
Open Shortest Path First (OSPF),
Routing Information Protocol (RIP)
- ❑ Provides only “Send” and “Delivery” services
Error and control messages generated by
Internet Control Message Protocol (ICMP)
- ❑ IP address: 32-bit = 4 decimal #s, e.g., 164.107.61.210

Raj Jain

IP Addressing: An Example

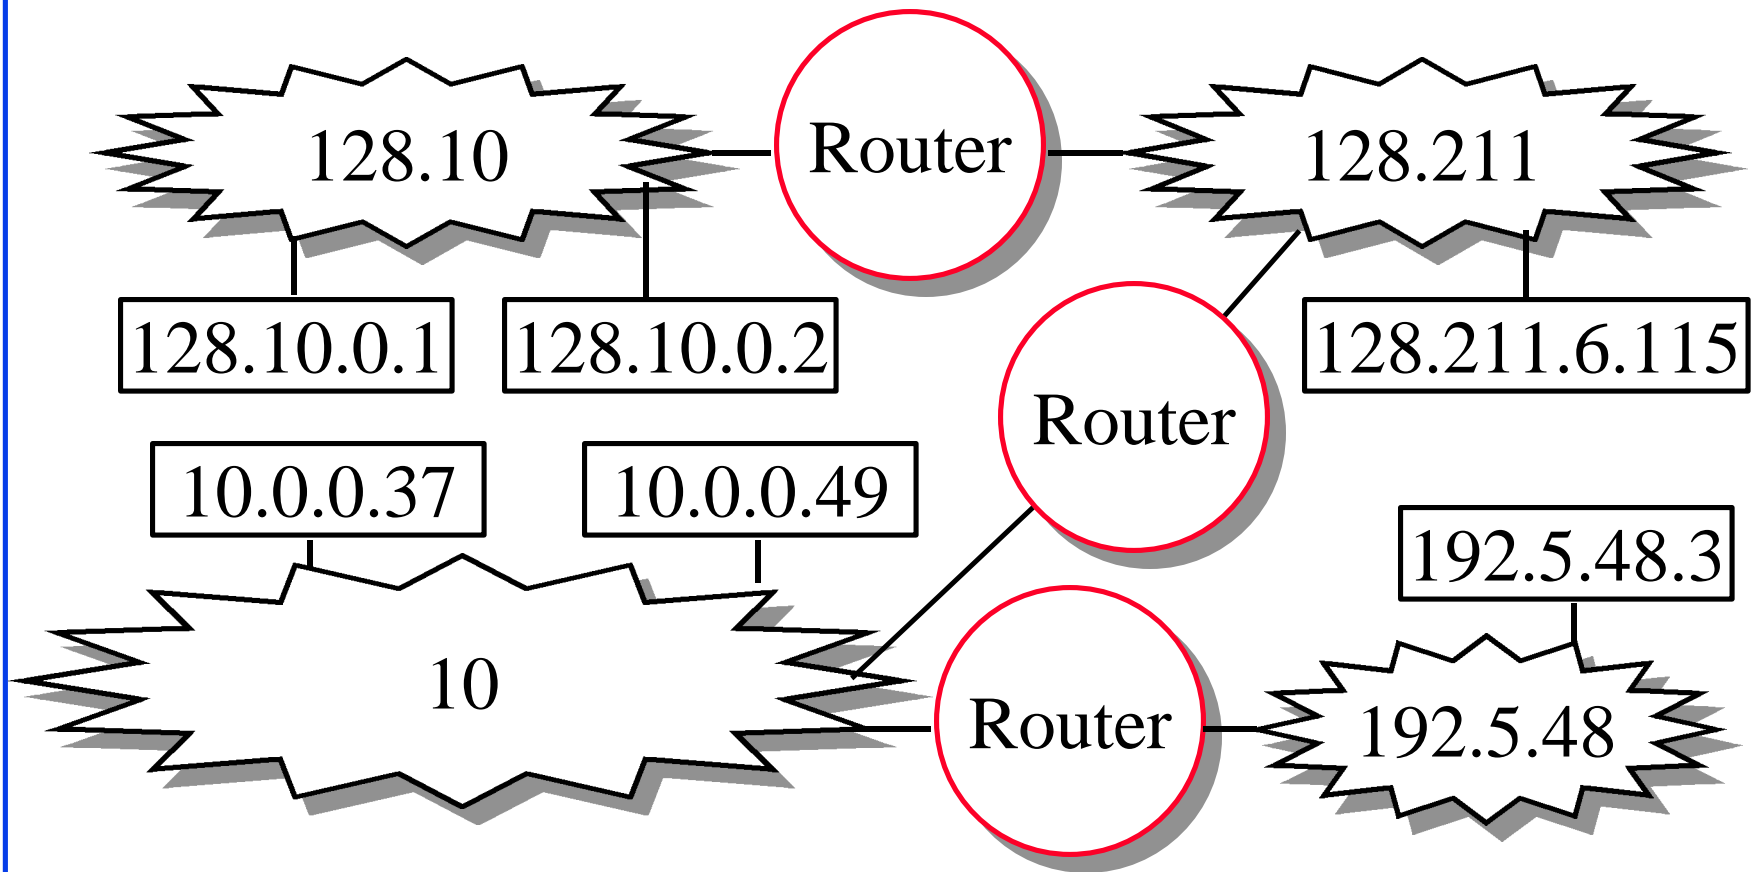

- All hosts on a network have the same network prefix

Fig 14.6

Raj Jain


Subnetwork

- ❑ Network = Multiple subnets connected via routers
- ❑ Generally each subnet is one Ethernet
- ❑ All hosts on the subnet have the same address prefix
- ❑ Mask .AND. Address = Prefix
- ❑ Example: First 23 bits = subnet

Address: 10010100 10101000 00010000 11110001

Mask: 11111111 11111111 11111110 00000000

.AND. 10010100 10101000 00010000 00000000

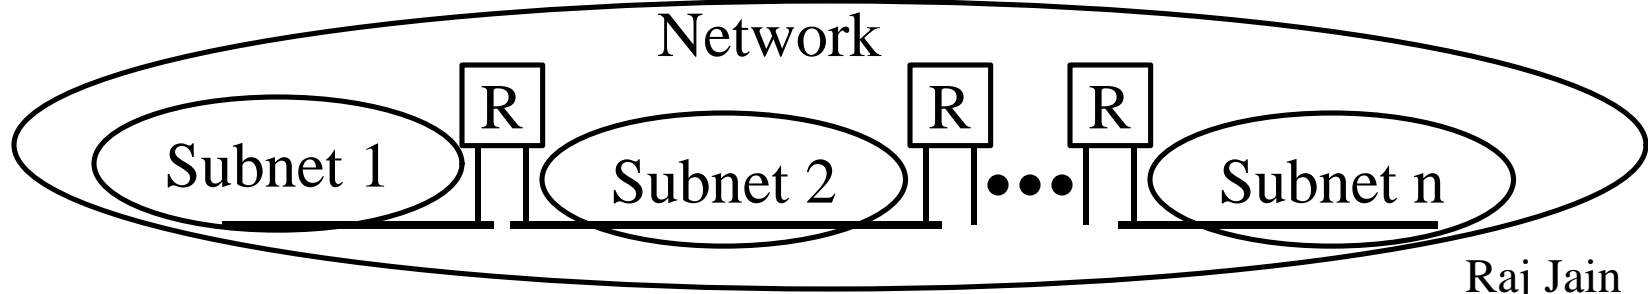

Raj Jain

Forwarding an IP Datagram

- ❑ Delivers datagrams to destination network (subnet)
- ❑ Routers maintain a “routing table” of “next hops”
- ❑ Next Hop field does not appear in the datagram

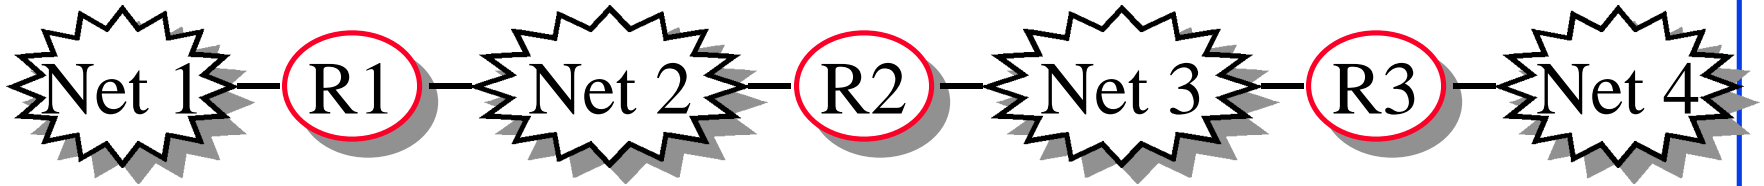


Table at R2:

Destination	Next Hop
Net 1	Forward to R1
Net 2	Deliver Direct
Net 3	Deliver Direct
Net 4	Forward to R3

Fig 16.2

Raj Jain

IPv6: How Many Addresses?

- ❑ 10 Billion people by 2020
- ❑ Each person will be served by more than one computer
- ❑ Assuming 100 computers per person $\Rightarrow 10^{12}$ computers
- ❑ More addresses may be required since
 - Multiple interfaces per node
 - Multiple addresses per interface
- ❑ Some believe 2^6 to 2^8 addresses per host
- ❑ Safety margin $\Rightarrow 10^{15}$ addresses
- ❑ IPng Requirements $\Rightarrow 10^{12}$ end systems and 10^9 networks. Desirable 10^{12} to 10^{15} networks

IPv6 Addresses

- ❑ 128-bit long. Fixed size
- ❑ $2^{128} = 3.4 \times 10^{38}$ addresses
 $\Rightarrow 665 \times 10^{21}$ addresses per sq. m of earth surface
- ❑ If assigned at the rate of $10^6/\mu\text{s}$, it would take 20 years
- ❑ Expected to support 8×10^{17} to 2×10^{33} addresses
 $8 \times 10^{17} \Rightarrow 1,564$ address per sq. m
- ❑ Allows multiple interfaces per host.
- ❑ Allows multiple addresses per interface
- ❑ Allows unicast, multicast, anycast
- ❑ Allows provider based, site-local, link-local
- ❑ 85% of the space is unassigned

Colon-Hex Notation

❑ **Dot-Decimal:** 127.23.45.88

❑ **Colon-Hex:**

FEDC:0000:0000:0000:3243:0000:0000:ABCD

○ Can skip leading zeros of each word

○ Can skip one sequence of zero words, e.g.,

FEDC::3243:0000:0000:ABCD

::3243:0000:0000:ABCD

○ Can leave the last 32 bits in dot-decimal, e.g.,

::127.23.45.88


○ Can specify a prefix by /length, e.g.,

2345:BA23:7::/40

IPv6 vs IPv4


- ❑ 1995 vs 1975
- ❑ IPv6 only twice the size of IPv4 header
- ❑ Only version number has the same position and meaning as in IPv4
- ❑ Added: Priority and flow label
- ❑ All fixed size fields.
- ❑ No optional fields. Replaced by extension headers.
- ❑ Allows “Plug and Play” as well as “Secure” address assignment

Dentist's Office

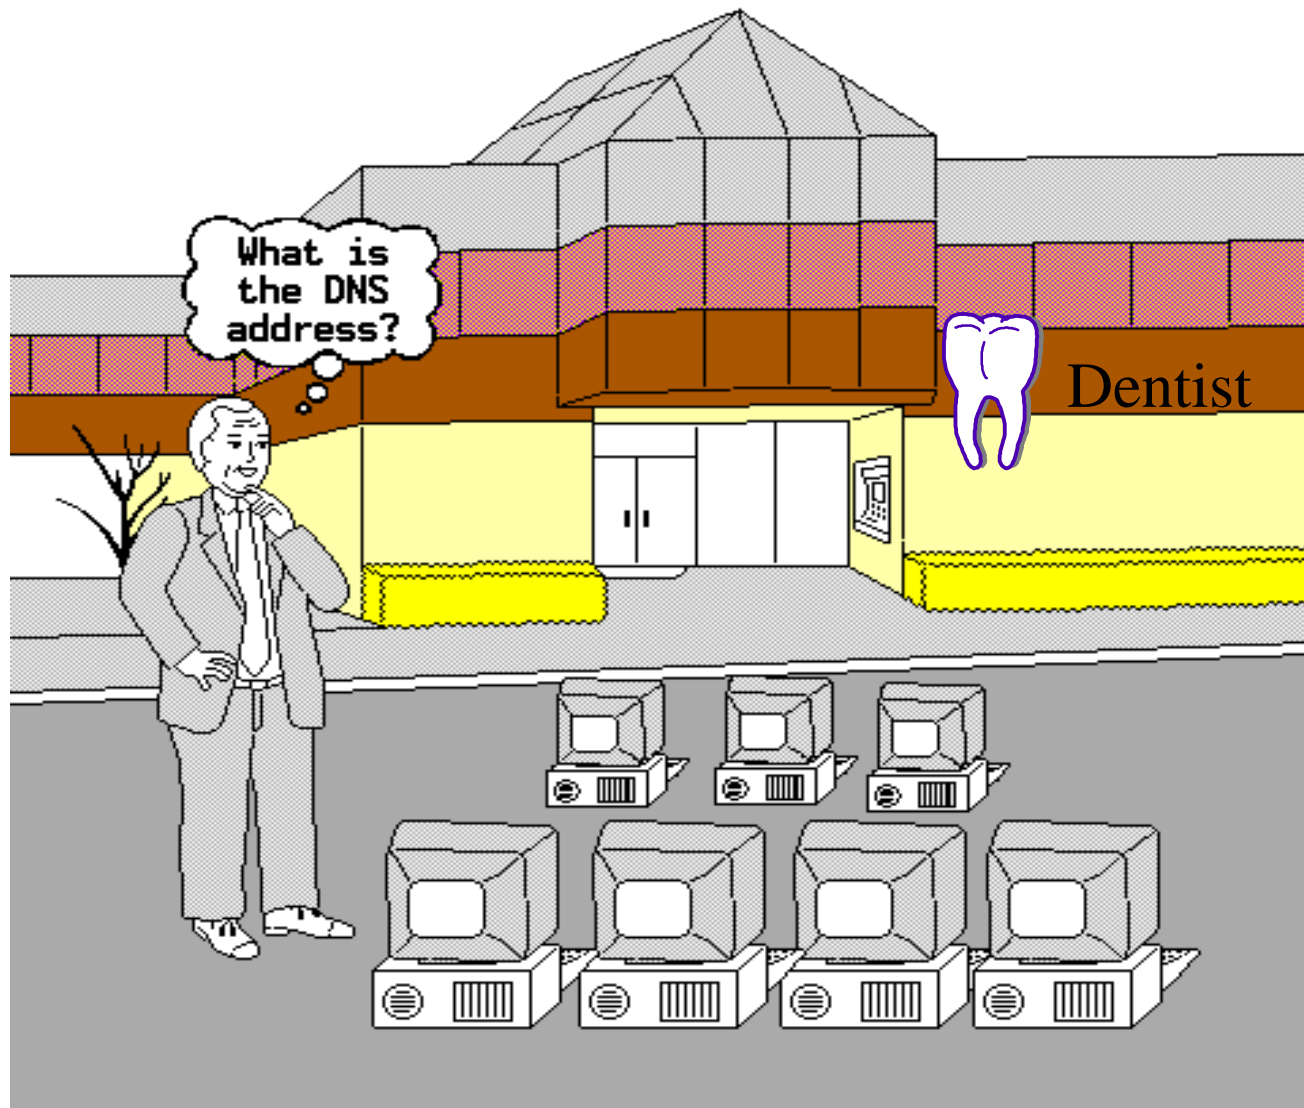

Raj Jain

1000 Computers on the Dock

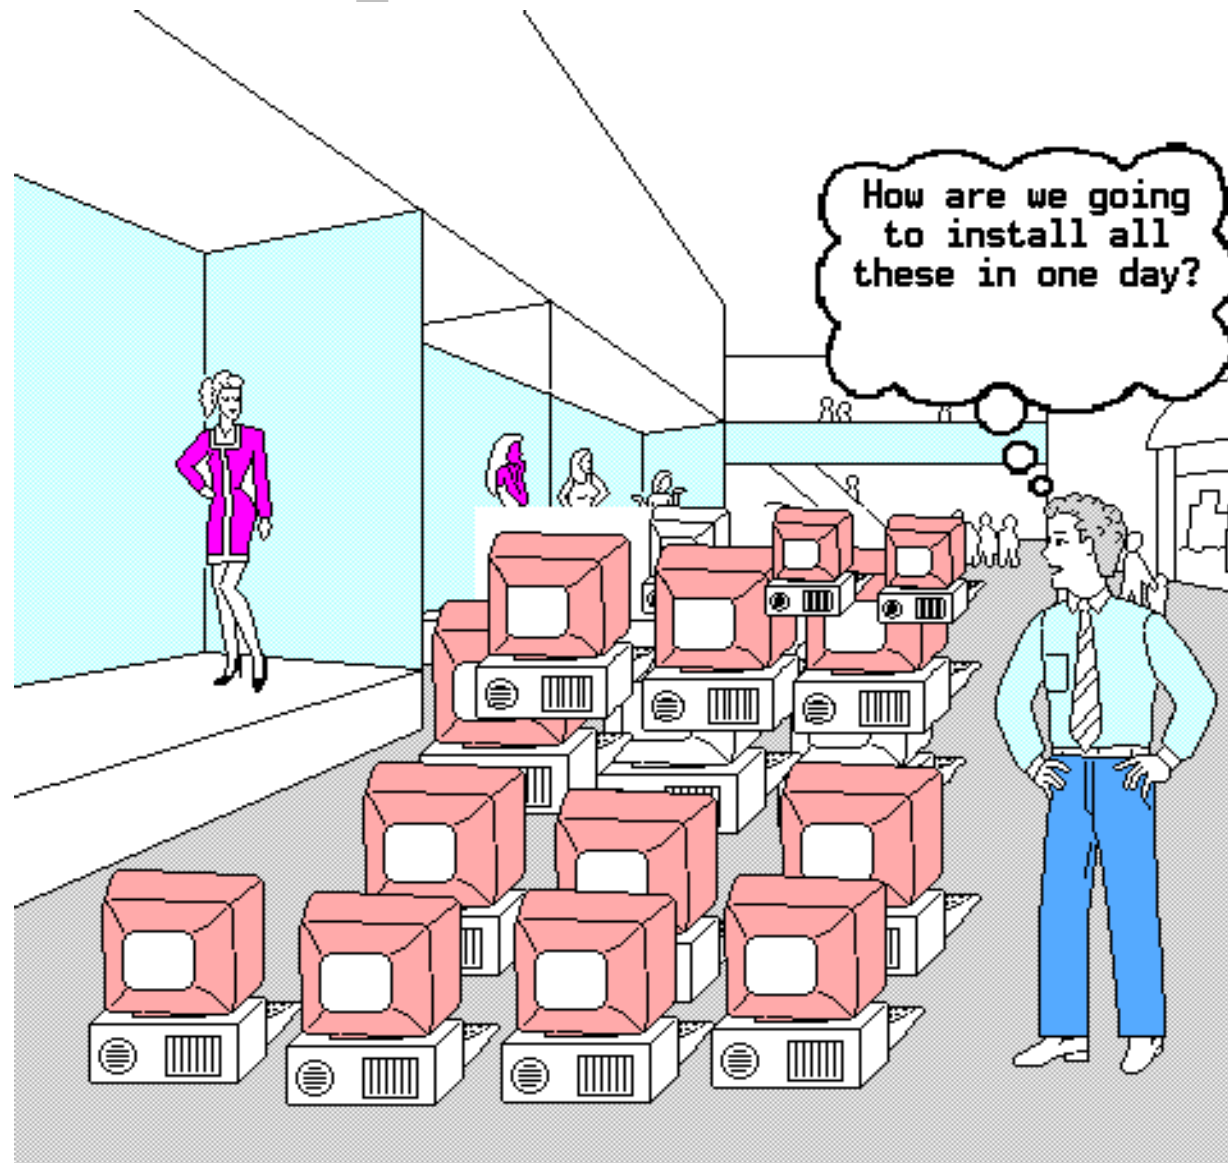

Raj Jain

TCP: Key Features


- ❑ Connection oriented
- ❑ Point-to-point communication: Two end-points
- ❑ Reliable transfer: Data is delivered in order
- ❑ Full duplex communication
- ❑ Stream interface: Continuous sequence of octets
- ❑ Reliable connection startup: Data on old connection does not confuse new connections
- ❑ Graceful connection shutdown: Data sent before closing a connection is not lost.

TCP Header

Source Port	Dest Port	Seq No	Ack No	Data Offset	Resvd	Control	Window
16	16	32	32	4	6	6	16
Check-sum	Urgent	Options	Pad	Data			
16	16	x	y		← Size in bits		

- ❑ Port (16 bits): Identifies source user process
20 = FTP, 23 = Telnet, 53 = DNS, 80 = HTTP, ...
- ❑ Ack number (32 bits): Next byte expected
- ❑ Window = Number bytes allowed to send


Domain Name System: Hierarchy

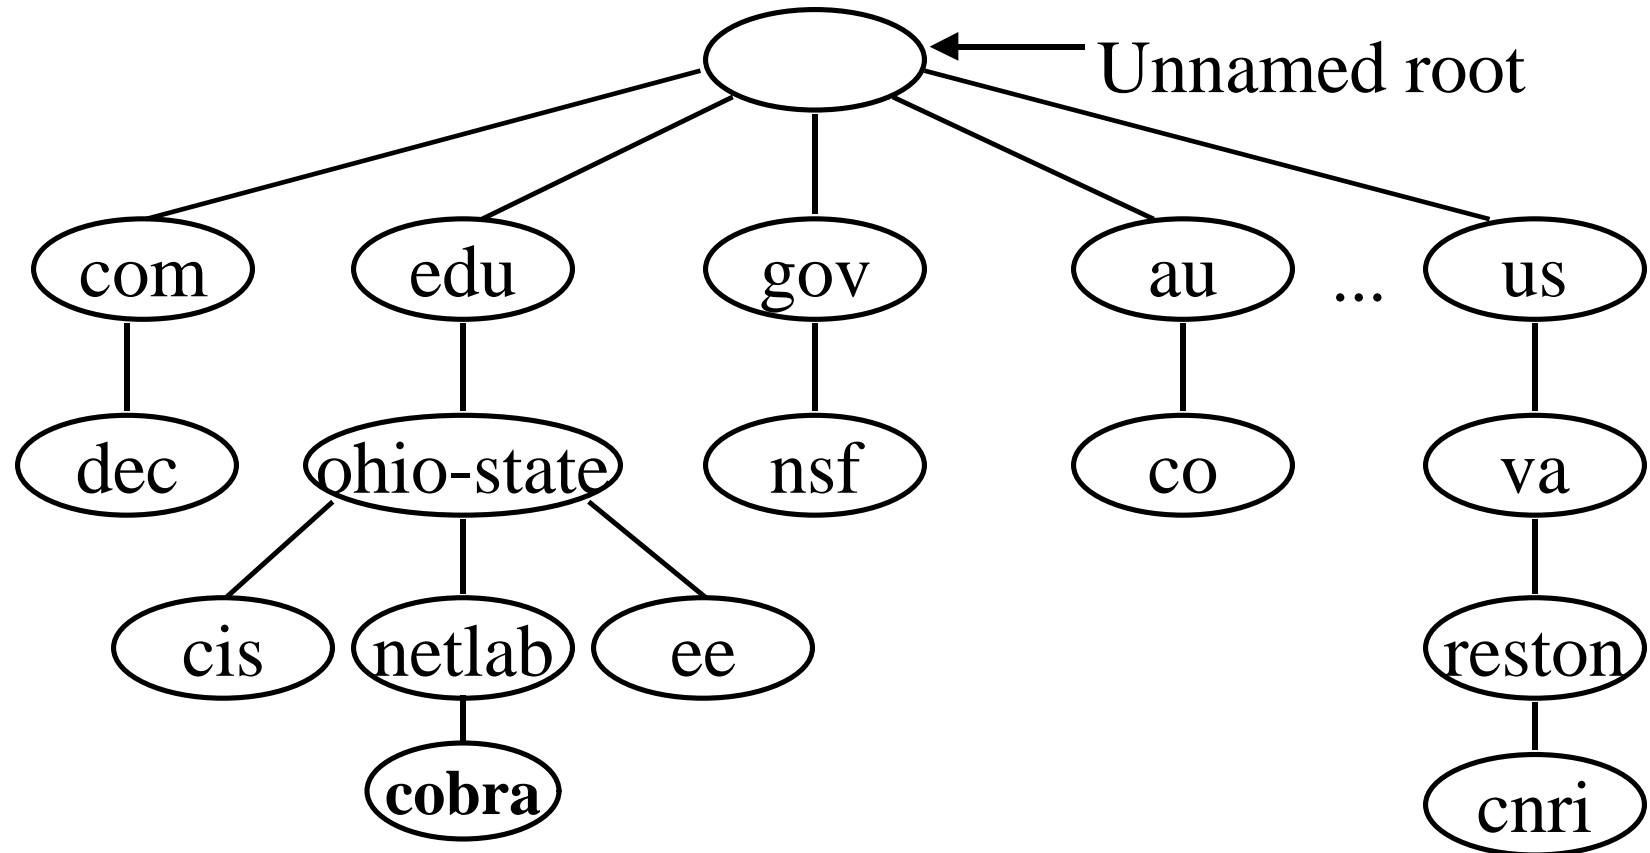

□ Example: cobra.netlab.ohio-state.edu


Raj Jain

Name Resolution

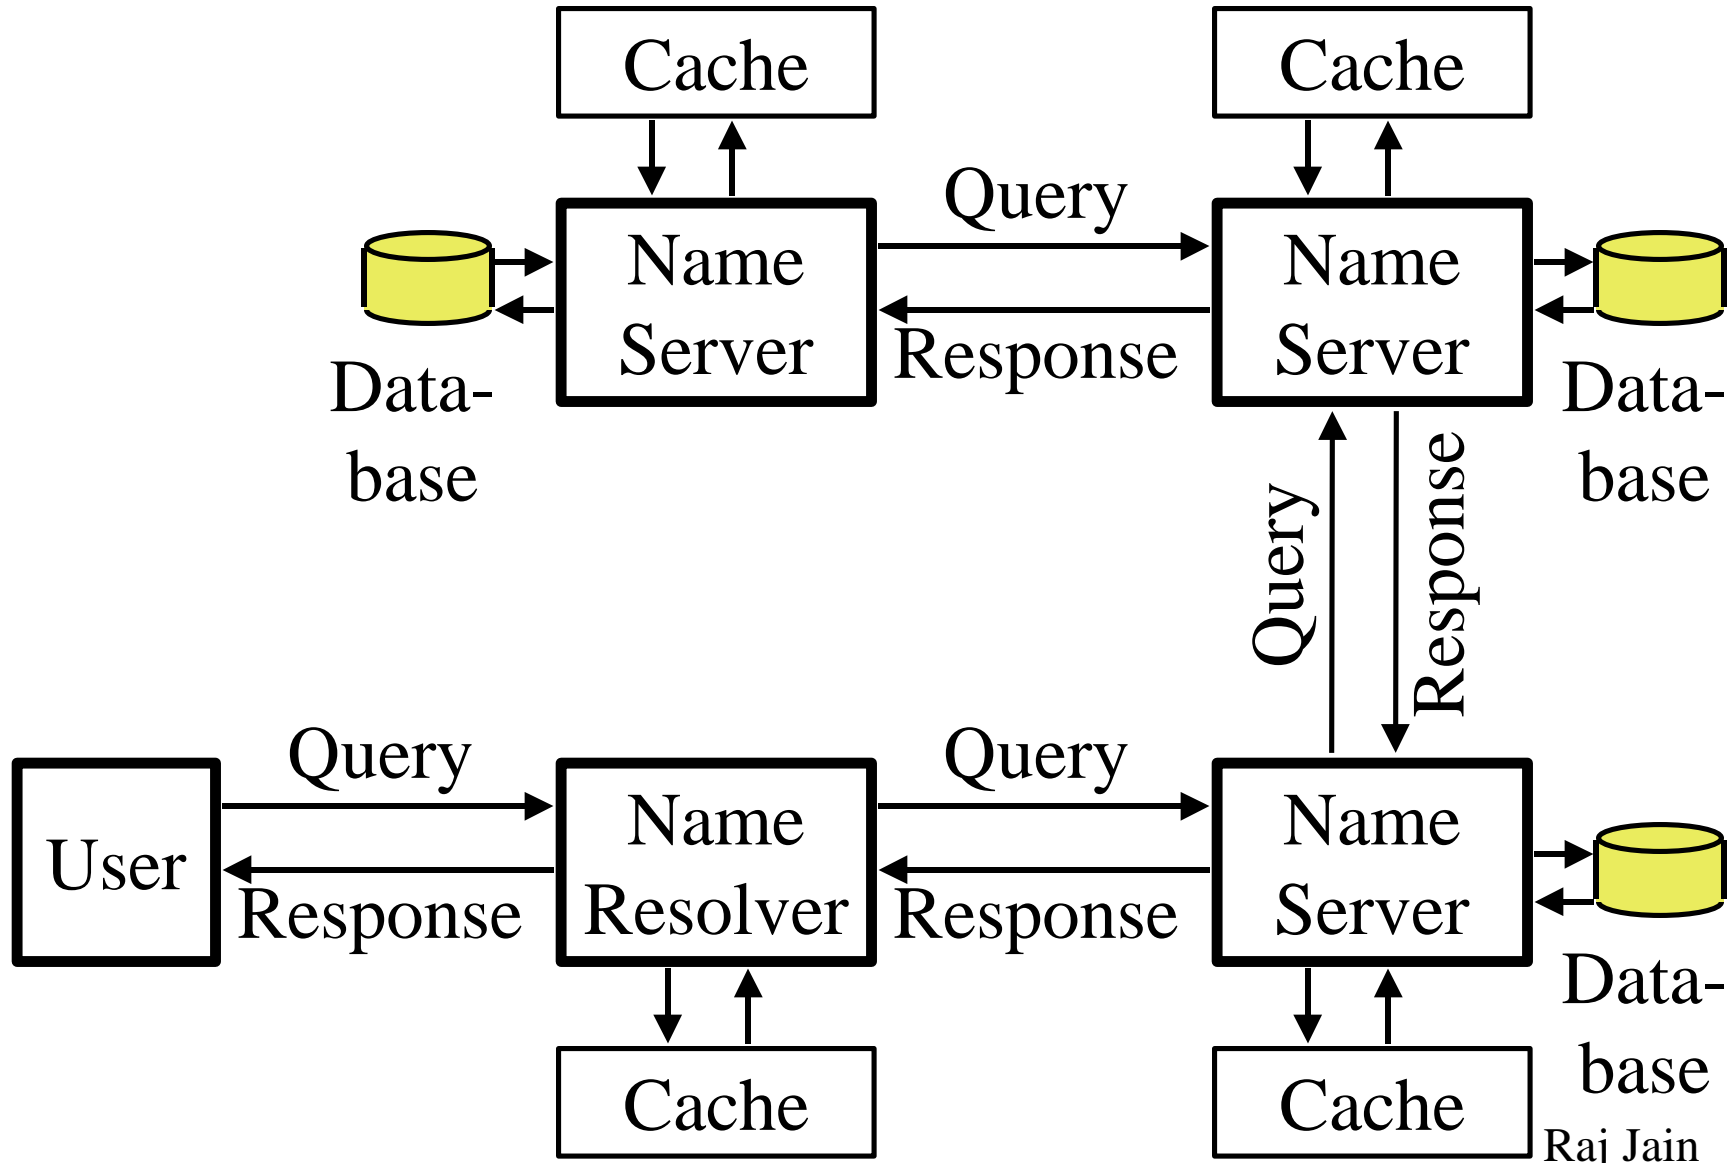

Raj Jain

Summary

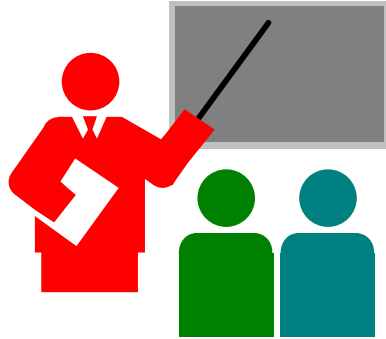

- ❑ IETF's RFCs and I-Ds are key sources for recent developments
- ❑ HDLC uses 01111110 flag and requires bit-stuffing
- ❑ Ethernet uses CSMA/CD
- ❑ IP is a connectionless forwarding protocol with 32-bit addresses
- ❑ IPv6 extends addresses to 128 bits
- ❑ TCP is a connection-oriented reliable stream protocol
- ❑ DNS allows name to address resolution

Raj Jain

Networking Basics: Key References

- ❑ W. Stallings, “Data and Computer Communications,” 5th Ed, Prentice Hall, 1997
- ❑ M. W. Murhammer, et al, “TCP/IP Tutorial and Technical Overview,” 6th Ed, Prentice Hall, 1998
- ❑ A. S. Tanenbaum, “Computer Networks,” 3rd Ed, Prentice Hall, 1996