
Aspects of ISAs

26

Aspects of ISAs


Begin with VonNeumann model

- Implicit structure of all modern ISAs
  - CPU + memory (data & insns)
  - Sequential instructions
- Format
  - Length and encoding
- **Operand model**
  - Where (other than memory) are operands stored?
- Datatypes and operations
- Control



27

The Sequential Model




- Implicit model of all modern ISAs
- Basic feature: the **program counter (PC)**
  - Defines **total order** on dynamic instruction
    - Next PC is PC++ (except for ctrl insns)
  - Order + **named storage** define computation
    Value flows from X to Y via storage A iff:

insn X	→ A	output A
insn Y	A →	input A

- Processor logically executes loop at left
  - Instruction execution assumed atomic
  - Instruction X finishes before insn X+1 starts
- More parallel alternatives have been proposed

28

Instruction Length and Format



Length

- Fixed length
  - Most common is 32 bits
  - \+ Simple implementation (next PC often just PC+4)
  - – Code density: 32 bits to increment a register by 1
- Variable length
  - \+ Code density
    - \+ x86 can do increment in one 8-bit instruction
  - – Complex fetch (where does next instruction begin?)
- Compromise: two lengths
  - E.g., MIPS16, ARM's Thumb, RISC-V

Encoding


- A few simple encodings simplify decoder
  - x86 decoder one nasty piece of logic

29

Example Instruction Encodings


MIPS

- Fixed length
- 32-bits, 3 formats, simple encoding




x86

- Variable length encoding (1 to 15 bytes)



30


Operations and Datatypes



- **Datatypes**
  - S/W: attribute of data
  - H/W: attribute of operation, data is just 0/1's
- **All processors support**
  - 2's complement integer arithmetic/logic (8/16/32/64-bit)
  - IEEE754 floating-point arithmetic (32/64 bit)
    - Intel has 80-bit floating-point
- **Most processors now support**
  - "Packed-integer" insns, *e.g.*, MMX
  - "Packed-fp" insns, *e.g.*, SSE/SSE2
  - For multimedia, more about these later
- **Processors no longer (??) support**
  - Decimal, other fixed-point arithmetic
  - Binary-coded decimal (BCD)

31

Where Does Data Live?



- **Memory**
  - Fundamental storage space
- **Registers**
  - Faster than memory, quite handy
  - Most processors have these too
- **Immediates**
  - Values spelled out as bits in instructions
  - Input only

How Much Memory? Address Size

- What does "64-bit" in a 64-bit ISA mean?
  - **Support memory size of 2^{64}**
  - Alternative (wrong) definition: width of calculation operations
- **"Virtual" address size**
  - Determines size of addressable (usable) memory
  - x86 evolution:
    - 4-bit (4004), 8-bit (8008), 16-bit (8086), 24-bit (80286),
    - 32-bit + protected memory (80386)
    - 64-bit (AMD's Opteron & Intel's EM64T Pentium4)
- Most ISAs moving to 64 bits (if not already there)

How Many Registers?

- Registers faster than memory, have as many as possible?
  - **No**
- One reason registers are faster: there are **fewer of them**
  - Small is fast (hardware truism)
- Another: they are **directly addressed** (no address calc)
  - More of them, means larger specifiers
  - Fewer registers per instruction or indirect addressing
- **Not everything can be put in registers**
  - Structures, arrays, anything pointed-to
- More registers → **more saving/restoring**
- Trend: more registers: 8 (x86)→32 (MIPS) →128 (IA64)
  - 64-bit x86 has 16 64-bit integer and 16 128-bit FP registers

How Are Memory Locations Specified?

- Registers are specified **directly**
  - Register names are short, encoded in instructions
  - Some instructions implicitly read/write certain registers
- How are addresses specified?
  - Addresses are long (64-bit)
  - **Addressing mode**: how are insn bits converted to addresses?

Memory Addressing

- **Addressing mode:** way of specifying address
  - Used in mem-mem or load/store instructions in register ISA
- Examples
  - **Register-Indirect:** R1=mem[R2]
  - **Displacement:** R1=mem[R2+immed]
  - **Index-base:** R1=mem[R2+R3]
  - **Memory-indirect:** R1=mem[mem[R2]]
  - **Auto-increment:** R1=mem[R2], R2= R2+1
  - **Auto-indexing:** R1=mem[R2+immed], R2=R2+immed
  - **Scaled:** R1=mem[R2+R3*immed1+immed2]
  - **PC-relative:** R1=mem[PC+imm]
- What high-level program idioms are these used for?
- What implementation impact? What impact on insn count?

Addressing Modes Examples

- MIPS and RISC-V
  - **Displacement**: R1+offset (fixed bit width for offset)
    - Experiments showed this covered 80% of accesses on VAX
- x86 (MOV instructions)
  - **Absolute**: zero + offset (8/16/32-bit)
  - **Register indirect**: R1
  - **Indexed**: R1+R2
  - **Displacement**: R1+offset (8/16/32-bit)
  - **Scaled:** R1 + (R2*Scale) + offset(8/16/32-bit)
    Scale = 1, 2, 4, 8

2 more issues: alignment & endianness


How Many Explicit Operands / ALU Insn?

- **Operand model**: how many explicit operands / ALU insn?
  - **3**: general-purpose
    `add R1,R2,R3` means [R1] = [R2] + [R3] **(MIPS, RISC-V)**
  - **2**: multiple explicit accumulators (output also input)
    `add R1,R2` means [**R2**] = [**R2**] + [R1] **(x86)**
  - **1**: one implicit accumulator
    `add R1` means ACC = ACC + [R1]
  - **0**: hardware stack
    `add` means STK[TOS++] = STK[--TOS] + STK[--TOS]
  - **4+**: useful only in special situations
- Examples show register operands but operands can be memory addresses, or mixed register/memory
- ISA w/register-only ALU insns are = **load-store architecture**

Operand Model Pros and Cons

- Metric I: **static code size**
  - Want: many implicit operands (stack), high level insns
- Metric II: **data memory traffic**
  - Want: many long-lived operands on-chip (load-store)
- Metric III: **CPI**
  - Want: short latencies, little variability (load-store)
- CPI and data memory traffic more important these days
- Trend: most new ISAs are **load-store ISAs** or hybrids

Control Transfers



- Default next-PC is PC + sizeof(current insn)
  - Note: PC called IR (instruction register) in x86
- Branches and jumps can change that
  - Otherwise dynamic program == static program
  - Not useful
- **Computing targets**: where to jump to
  - For all branches and jumps
  - Absolute / PC-relative / indirect
- **Testing conditions**: whether to jump at all
  - For (conditional) branches only
  - Compare-branch / condition-codes / condition registers

Control Transfers I: Computing Targets

- The issues
  - How far (statically) do you need to jump? (w/in fn vs outside)
  - Do you need to jump to a different place each time?
  - How many bits do you need to encode the target?
- **PC-relative**
  - Position-independent within procedure
  - Used for branches and jumps within a procedure
- **Absolute**
  - Position independent outside procedure
  - Used for procedure calls
- **Indirect** (target found in register)
  - Needed for jumping to dynamic targets
  - For **returns**, dynamic procedure calls, `switch` statements

Control Transfers II: Testing Conditions

- **Compare and branch insns**
  ```
  branch-less-than R1,10,target
  ```
  + Simple
  – Two ALUs (for condition & target address)
  – Extra latency
- **Implicit condition codes (x86, RISC-V)**
  ```
  cmp R1,10   // sets "negative" CC/flag
  branch-neg target
  ```
  + More room for target, condition codes set "for free"
  + Branch insn simple and fast
  – Implicit dependence is tricky
- **Conditions in regs, separate branch (MIPS)**
  ```
  set-less-than R2,R1,10
  branch-not-equal-zero R2,target
  ```
  – Additional insns
  + one ALU per insn, explicit dependence
  > 80% of branches are (in)equalities/comparisons to 0

ISAs Also Include Support For…

- **Operating systems & memory protection**
  - Privileged mode
  - System call (TRAP)
  - Exceptions & interrupts
  - Interacting with I/O devices
- **Multiprocessor support**
  - "Atomic" operations for synchronization
- **Data-level parallelism**
  - Pack many values into a wide register
    - Intel's SSE2: 4x32-bit float-point values in 128-bit register
  - Define parallel operations (four "adds" in one cycle)

The RISC vs. CISC Debate

RISC and CISC

- **RISC**: reduced-instruction set computer
  - Coined by Patterson in early 80s
  - Berkeley RISC-I (Patterson), Stanford MIPS (Hennessy), IBM 801 (Cocke), PowerPC, ARM, SPARC, Alpha, RISC-V
- **CISC**: complex-instruction set computer
  - Term didn't exist before "RISC"
  - x86, VAX, Motorola 68000, etc.

- Philosophical war (one of several) started in mid 1980s
  - RISC "won" the technology battles
  - CISC won the high-end commercial war (1990s to today)
    - Compatibility a stronger force than anyone (but Intel) thought
  - RISC won the embedded computing war

The Setup

- Pre 1980
  - Bad compilers (so assembly written by hand)
  - Complex, high-level ISAs (easier to write assembly)
- Around 1982
  - Moore's Law makes fast single-chip microprocessor possible… **…but only for small, simple ISAs**
  - Performance advantage of "integration" was compelling
  - Compilers had to get involved in a big way

RISC manifesto: create ISAs that…
- **Simplify single-chip implementation**
- **Facilitate optimizing compilation**

The RISC Tenets

- **Single-cycle execution**
  - CISC: many multicycle operations
- **Hardwired control**
  - CISC: microcoded multi-cycle operations
- **Load/store architecture**
  - CISC: register-memory and memory-memory
- **Few memory addressing modes**
  - CISC: many modes
- **Fixed-length instruction format**
  - CISC: many formats and lengths
- **Reliance on compiler optimizations**
  - CISC: hand assemble to get good performance
- **Many registers** (compilers are better at using them)
  - CISC: few registers

CISCs and RISCs

- **The CISCs: x86, VAX** (**V**irtual **A**ddress e**X**tension to PDP-11)
  - Variable length instructions: 1-321 bytes!!!
  - 14 GPRs + PC + stack-pointer + condition codes
  - Data sizes: 8, 16, 32, 64, 128 bit, decimal, string
  - Memory-memory instructions for all data sizes
  - Special insns: `crc`, `insque`, `polyf`, and a cast of hundreds
  - x86: "Difficult to explain and impossible to love"
- **The RISCs: MIPS, SPARC, PowerPC, Alpha, ARM, RISC-V**
  - 32-bit instructions
  - 32 integer registers, 32 floating point registers, load-store
  - 64-bit virtual address space
  - Few addressing modes (Alpha has 1, SPARC/PowerPC more)
  - Why so many? Everyone wanted their own

The Debate

- RISC argument
  - CISC is fundamentally handicapped by complexity
  - For a given technology, RISC will be better (faster)
    - Current technology enables single-chip RISC
    - When it enables single-chip CISC, RISC will be pipelined
    - When it enables pipelined CISC, RISC will have caches
    - When it enables CISC with caches, RISC will have next thing...

- CISC rebuttal
  - CISC flaws not fundamental, fixable with more transistors
  - Moore's Law will narrow the RISC/CISC gap (true)
    - Good pipeline: RISC = 100K transistors, CISC = 300K
    - By 1995: 2M+ transistors had evened playing field
  - Software costs dominate, **compatibility** is paramount

Current Winner (Volume): RISC

- ARM (Acorn RISC Machine → Advanced RISC Machine)
  - First ARM chip in mid-1980s (from Acorn Computer Ltd).
  - 1.2 billion units sold in 2004 (>50% of all 32/64-bit CPUs)
  - Low-power and **embedded** devices (iPod, for example)
    - Significance of embedded? ISA compatibility less powerful force
- 32-bit RISC ISA
  - 16 registers, PC is one of them
  - Many addressing modes, e.g., auto increment
  - Condition codes, each instruction can be conditional
- Multiple implementations
  - X-scale (design was DEC's, bought by Intel, sold to Marvel)
  - Others: Freescale (was Motorola), Texas Instruments, STMicroelectronics, Samsung, Sharp, Philips, etc.

Current Winner (Revenue): CISC

- **x86 was first 16-bit microprocessor by ~2 years**
  - IBM put it into its PCs because there was no competing choice
  - Rest is historical inertia and "financial feedback"
    - x86 is most difficult ISA to implement and do it fast but…
    - Because Intel sells the most **non-embedded** processors…
    - It has the most money…
    - Which it uses to hire more and better engineers…
    - Which it uses to maintain competitive performance …
    - **And given competitive performance, compatibility wins…**
    - So Intel sells the most **non-embedded** processors…
  - AMD as a competitor keeps pressure on x86 performance
- Moore's law has helped Intel in a big way
  - Most engineering problems can be solved with more transistors

Intel's Compatibility Trick: RISC Inside

- 1993: Intel wanted out-of-order execution in Pentium Pro
  - Hard to do with a coarse grain ISA like x86
- Solution? Translate x86 to RISC **µops** in hardware

```
push $eax
```

becomes (we think, uops are proprietary)

```
store $eax [$esp-4]
addi $esp,$esp,-4
```

  + Processor maintains **x86 ISA externally for compatibility**
  + But executes **RISC µISA internally for implementability**
  - Given translator, x86 almost as easy to implement as RISC
    - Intel implemented out-of-order before any RISC company
    - Also, OoO also benefits x86 more (because ISA limits compiler)
  - Idea co-opted by other x86 companies: AMD and Transmeta

Enter Micro-Ops (1)

Most instructions are a **single** micro-op, µop

- Add, xor, compare, branch, *etc.*
- Loads example: mov -4(%rax), %ebx
- Stores example: mov %ebx, -4(%rax)

Each operation on a memory location → micro-ops++

- "addl -4(%rax), %ebx" = 2 µops (load, add)
- "addl %ebx, -4(%rax)" = 3 µops (load, add, store)

What about address generation?

- **Simple** address generation: single micro-op
- **Complicated** (scaled addressing) & sometimes store addresses: calculated separately

Enter Micro-Ops (2)

Function call (CALL) – 4 µops

- Get program counter, store program counter to stack, adjust stack pointer, unconditional jump to function start

Return from function (RET) – 3 µops

- Adjust stack pointer, load return address from stack, jump to return address

Other operations


- String manipulations instructions
  - For example STOS is around six micro-ops, etc.

Micro-ops: part of the *microarchitecture*, not the architecture

Cracking Macro-ops into Micro-ops

Two forms of µop "cracking"

- **Hard-coded logic:** fast, but expensive (for insn in few µops)
  - Simple Decoder: 1→1
  - Complex Decoder: 1→ 2-4
    - 4x in size
- **Table Lookup:** slow, but "off to the side" (not shown)
  → doesn't complicate rest of machine
  - Handles *really* complicated instructions

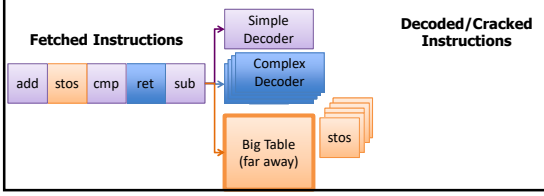

Micro-Op changes over time

x86 code is becoming more "RISC-like".
IA32 → x86-64:

1. Double number of registers
2. Better function calling conventions
   - Result? Fewer pushes, pops, and complicated instructions
     ~1.6 µops / macro-op → ~1.1 µops / macro-op

Fusion: Intel's newest processors fuse certain instruction pairs

- **Macro-op fusion:** fuses "compare" and "branch" instructions
  - 2 macro-ops → 1 simple micro-op (uses simple decoder)
- **Micro-op fusion:** fuses ld/add pairs, fuses store "addr" & "data"
  - 1 complex micro-op → 1 simple micro-op (uses simple decoder)

56

Ultimate Compatibility Trick

- Support old ISA with…
  - …a simple processor for that ISA in the system
  - How first Itanium supported x86 code
    - x86 processor (comparable to Pentium) on chip
  - How PlayStation2 supported PlayStation games
    - Used PlayStation processor for I/O chip **& emulation**

57

Translation and Virtual ISAs

- New compatibility interface: ISA + translation software
  - **Binary-translation**: transform static image, run native
  - **Emulation**: unmodified image, interpret each dynamic insn, optimize on-the-fly
  - Examples: FX!32 (x86 on Alpha), Rosetta (PowerPC on x86)
- **Virtual ISAs**: designed for translation, not direct execution
  - Target for high-level compiler (one per language)
  - Source for low-level translator (one per ISA)
  - Examples: Java Bytecodes, C# CLR (Common Language Runtime)
- **Transmeta's Code morphing**: x86 translation in software
  - Only "code morphing" translation software written in native ISA
  - Native ISA is invisible to applications and even OS

58

RISC & CISC for Performance

Recall performance equation:

$$\frac{\text{seconds}}{\text{program}} = \frac{\text{instructions}}{\text{program}} \times \frac{\text{cycles}}{\text{instruction}} \times \frac{\text{seconds}}{\text{cycle}}$$

CISC (Complex Instruction Set Computing)
RISC (Reduced Instruction Set Computing)

	insns / program	cycles / insn	seconds / cycle	other
CISC				
RISC				



59

RISC & CISC for Performance

Recall performance equation:

$$\frac{\text{seconds}}{\text{program}} = \frac{\text{instructions}}{\text{program}} \times \frac{\text{cycles}}{\text{instruction}} \times \frac{\text{seconds}}{\text{cycle}}$$

CISC (Complex Instruction Set Computing)
RISC (Reduced Instruction Set Computing)

	insns / program	cycles / insn	seconds / cycle	other
CISC	↓	↑	↑	+ Easy for assembly-level programmers + good code density
RISC				

60

RISC & CISC for Performance

Recall performance equation:

$$\frac{\text{seconds}}{\text{program}} = \frac{\text{instructions}}{\text{program}} \times \frac{\text{cycles}}{\text{instruction}} \times \frac{\text{seconds}}{\text{cycle}}$$

CISC (Complex Instruction Set Computing)
RISC (Reduced Instruction Set Computing)

	insns / program	cycles / insn	seconds / cycle	other
CISC	↓	↑	↑	+ Easy for assembly-level programmers + good code density
RISC	↑ hopefully not *too* much	↓	↓ *if designed aggressively*	+ smart compilers can help with insns/program

61